



GRAVELY®



2023 | BID SPEC

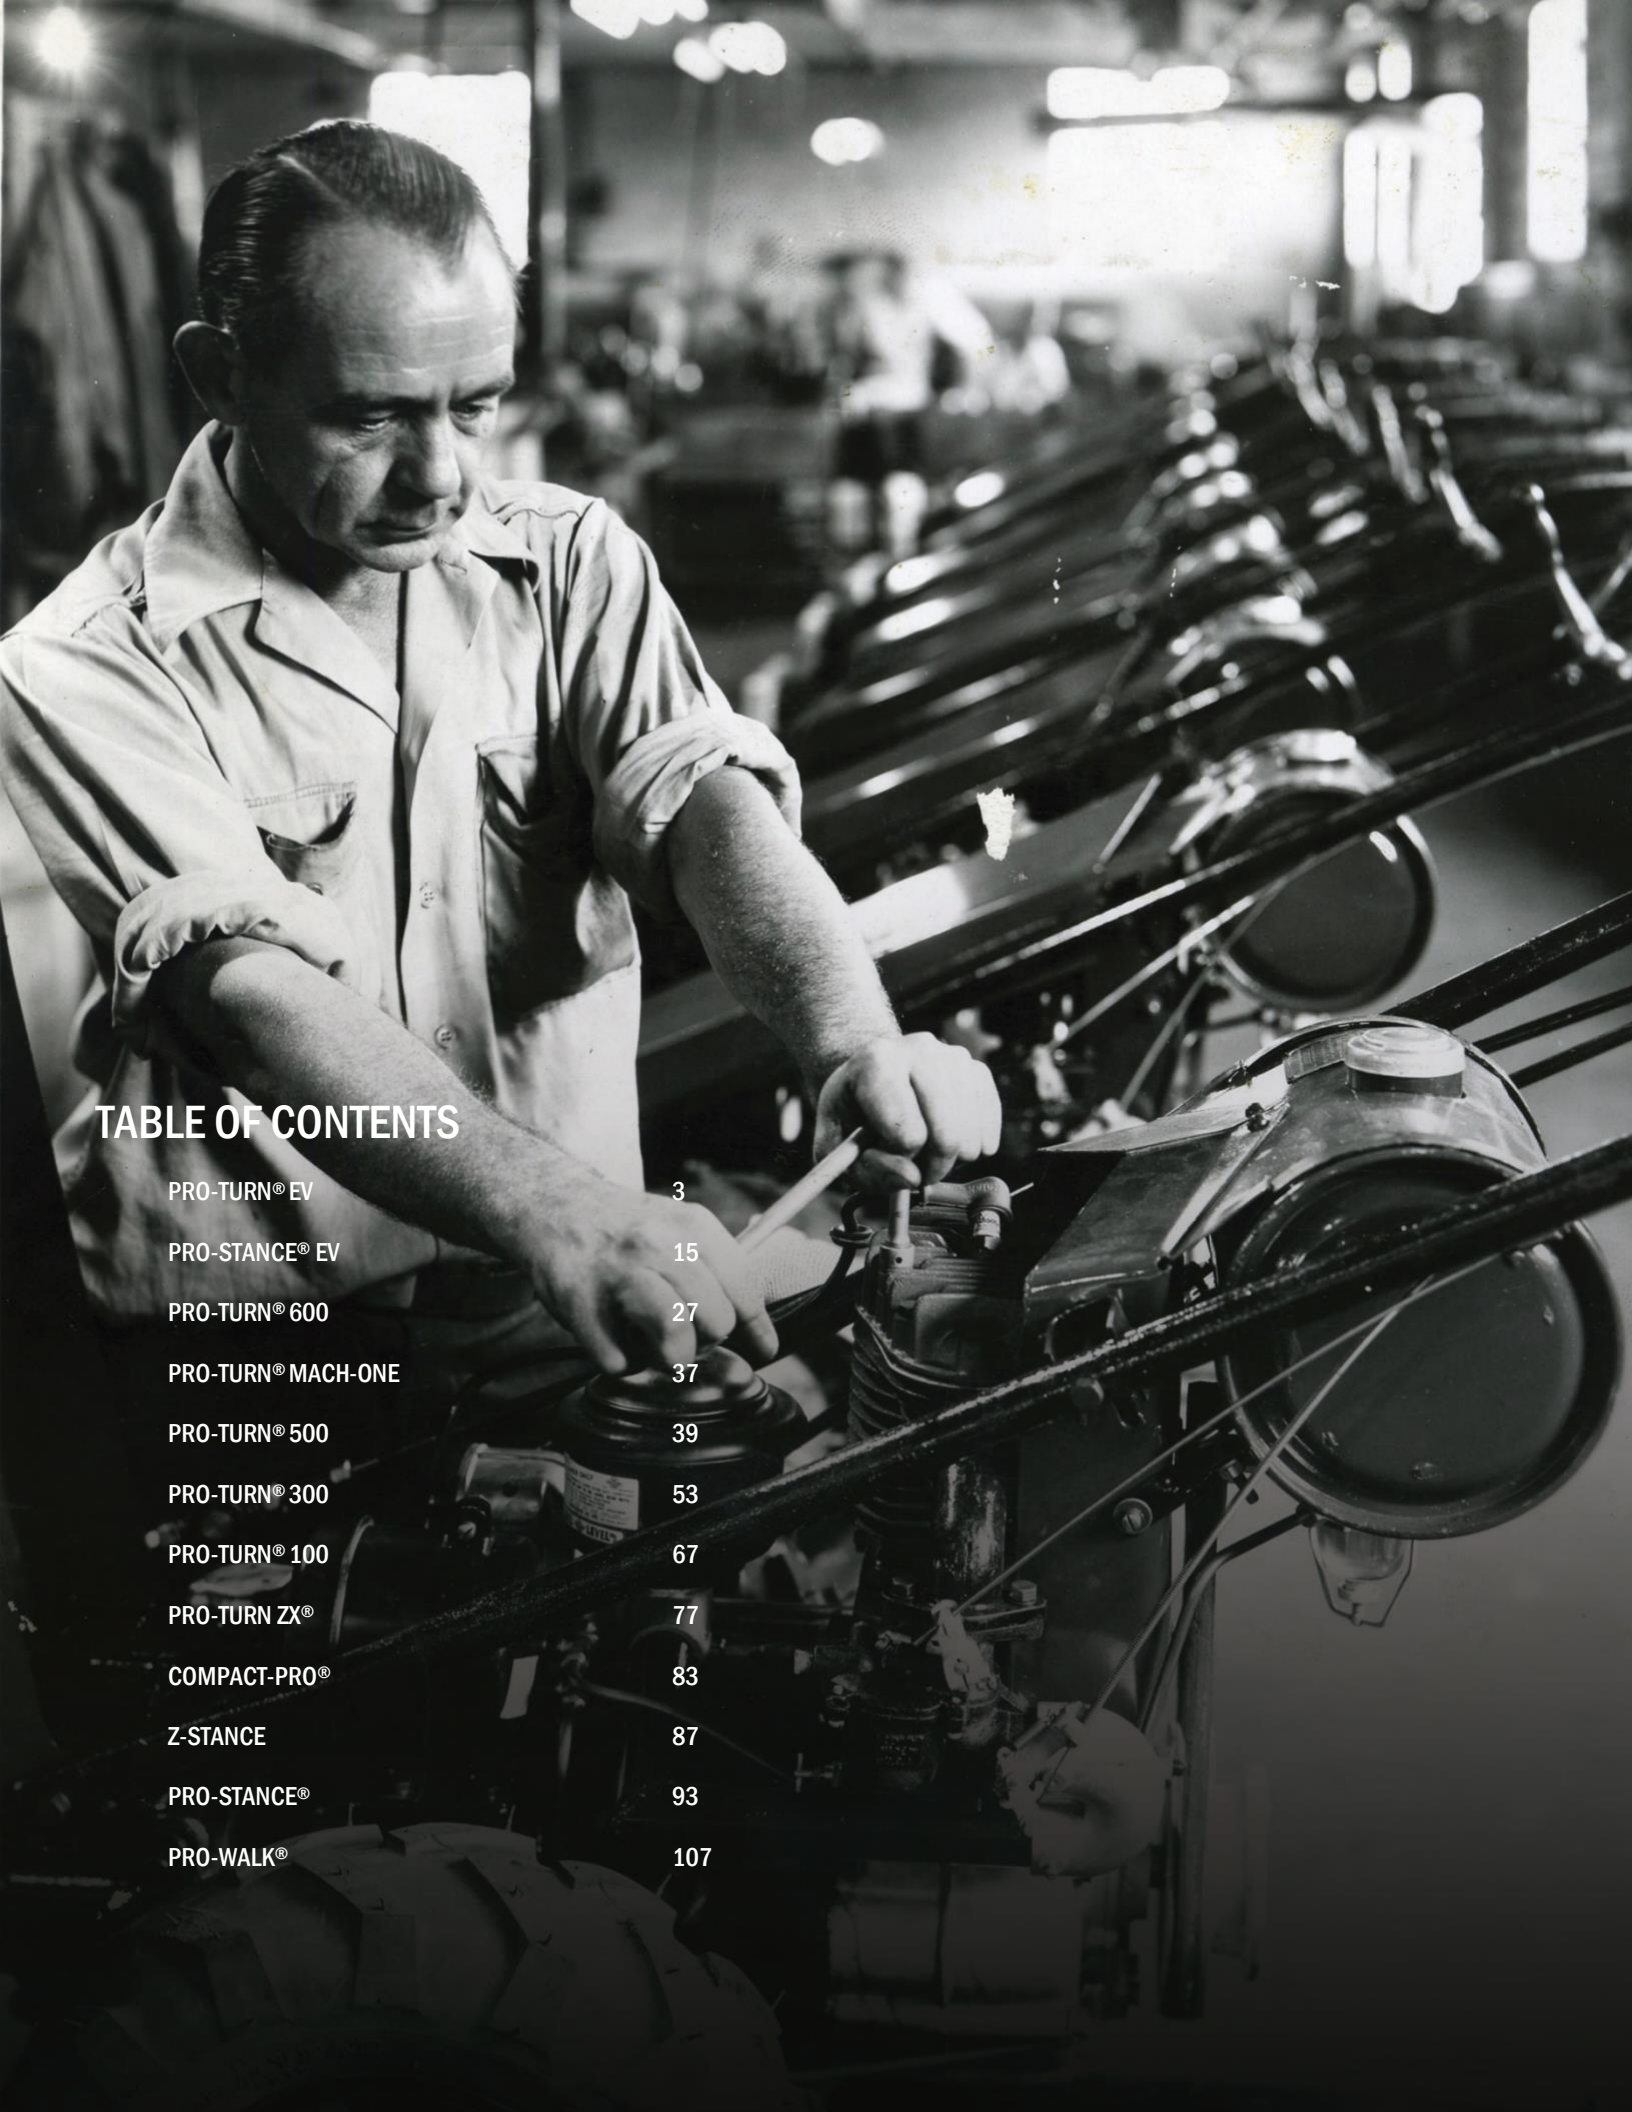


TABLE OF CONTENTS

PRO-TURN® EV	3
PRO-STANCE® EV	15
PRO-TURN® 600	27
PRO-TURN® MACH-ONE	37
PRO-TURN® 500	39
PRO-TURN® 300	53
PRO-TURN® 100	67
PRO-TURN ZX®	77
COMPACT-PRO®	83
Z-STANCE	87
PRO-STANCE®	93
PRO-WALK®	107

Pro-Turn EV 60 SD

Model Number: 997007

Power

Brand:	FusionCore™
Type:	Lithium Ion
Power:	16 kWh total energy
Displacement:	4 – 4 kWh Quick Swap Batteries
Charging System:	12-hour Smart Charger

ENGINE DECK/FRAME

Drive Wheels / Tires:	Turf 22 x 12 – 12
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 2.5" tubular frame
Foot Plate:	Steel with extrusions to prevent slipping, flip up for ease of belt maintenance

DRIVE SYSTEM

Type:	Electric Drive
Transmission:	Next-Gen Wheel Drive- Brushless electric drive motor coupled with dual reduction planetary gearbox
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	NA
Brakes:	Mechanical lever parking break with electric fail safe
Instrument Panel:	Mounted on the right-hand side of the operator, key switch, Eco-Mode, interactive display
Forward Speed Range:	Two Speed 0 – 11 mph and 0 – 8 mph
Reverse Speed Range:	0 – 5.5 mph

CUTTING DECK

Type:	Side Discharge Floating, adjustable, anti-scalping
Construction:	7-gauge steel with .25-inch spindle reinforcement X-Factor® 3 Fabricated Deck
Cutting Width:	60"
Cutting Height Adjustment:	Foot-operated pedal adjustment from operator's seat, Pin style selector makes it easy to change cutting height by simply placing a pin desired height of cut Cutting Height: 1.5-5" in ¼" increments, 15 positions
Discharge Chute:	Flip-up, flexible rubber chute for strength and durability, minimizes damage to landscape and trees, and eases transport of the machine
Front Caster Wheels:	Smooth 13 x 6.5 – 6 pneumatic
Spindles:	X3 Constant Drive Spindle- Proprietary 3.5kWh spindle motors
Cutter Deck Belts:	NA
Blades:	3–20.5"
Blade Tip Speed:	17,000 fpm
Eco-Mode Speed:	14,000 fpm

Pro-Turn EV60 Model Number: 997007

ADDITIONAL SPECIFICATIONS

ROPS:	Foldable ROPS is standard, retractable seatbelt included
Seat:	High Back Suspension Seat with adjustable arm rest
Cup Holder:	Molded into left fender
Paint:	Powder-coat paint

DIMENSIONS

Length:	83"
Width W/O Chute:	63"
Height with ROPS:	72"
Weight:	1312 lbs.

WARRANTY

Commercial:	5 Year or 1500 Hour Limited Commercial Warranty, No limit for first 2 years
Battery:	3 Year

OPTIONAL ACCESSORIES:

FusionCore Batteries	897001
Off Board Charger	897002
Fast Charger (6 hours)	797012
Operator Controlled Chute Baffle	792216
LED Headlight Kit	797004
Mulching Kit (SD Only)	797020
Safety Beacon	797005
Sunshade Hard Top	792180
Tweel Tire Kit	797029
Front Weight Kit	797024
60" High-Lift Blade Kit	797020

Pro-Turn EV 60 SD- No Batteries

Model Number: 997013

No Battery model

All other product details are the same- Does not Include the 4 FusionCore™ Quick Swap batteries.
Machine- Will need the minimum of 2-FusionCore™ Quick Swap batteries to operate.

DIMENSIONS

Length:	83"
Width W/O Chute:	63"
Height with ROPS:	72"
Weight:	1104 lbs.

Pro-Turn EV 48 SD

Model Number: 997005

Power

Brand:	FusionCore™
Type:	Lithium Ion
Power:	16 kWh total energy
Displacement:	4 – 4 kWh Quick Swap Batteries
Charging System:	12-hour Smart Charger

ENGINE DECK/FRAME

Drive Wheels / Tires:	Turf 22 x 12 – 12
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 2.5" tubular frame
Foot Plate:	Steel with extrusions to prevent slipping, flip up for ease of belt maintenance

DRIVE SYSTEM

Type:	Electric Drive
Transmission:	Next-Gen Wheel Drive- Brushless electric drive motor coupled with dual reduction planetary gearbox
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	NA
Brakes:	Mechanical lever parking break with electric fail safe
Instrument Panel:	Mounted on the right-hand side of the operator, key switch, Eco-Mode, interactive display
Forward Speed Range:	Two Speed 0 – 11 mph and 0 – 8 mph
Reverse Speed Range:	0 – 5.5 mph

CUTTING DECK

Type:	Side Discharge Floating, adjustable, anti-scalping
Construction:	7-gauge steel with .25-inch spindle reinforcement X-Factor® 3 Fabricated Deck
Cutting Width:	48"
Cutting Height Adjustment:	Foot-operated pedal adjustment from operator's seat, Pin style selector makes it easy to change cutting height by simply placing a pin desired height of cut
Cutting Height:	1.5-5" in ¼" increments, 15 positions
Discharge Chute:	Flip-up, flexible rubber chute for strength and durability, minimizes damage to landscape and trees, and eases transport of the machine
Front Caster Wheels:	Smooth 13 x 6.5 – 6 pneumatic
Spindles:	X3 Constant Drive Spindle- Proprietary 3.5kWh spindle motors
Cutter Deck Belts:	NA
Blades:	3–16.19"
Blade Tip Speed:	17,000 fpm
Eco-Mode:	14,000 fpm

ADDITIONAL SPECIFICATIONS

ROPS:	Foldable ROPS is standard, retractable seatbelt included
Seat:	High Back Suspension Seat with adjustable arm rest
Cup Holder:	Molded into left fender
Paint:	Powder-coat paint

DIMENSIONS

Length:	83"
Width W/O Chute:	50"
Height with ROPS:	72"
Weight:	1261 lbs.

WARRANTY

Commercial: 5 Year or 1500 Hour Limited Commercial Warranty, No limit for first 2 years
Battery: 3 Year

OPTIONAL ACCESSORIES:

FusionCore Batteries	897001
Off Board Charger	897002
Fast Charger (6 hours)	797012
LED Headlight Kit	797004
Safety Beacon	797005
Sunshade Hard Top	792180
Tweel Tire Kit	797029
Front Weight Kit	797024
High-Lift Blade Kit	797021
Operator Controlled Chute Baffle	792216
Grass Mulching Kit	797018

Pro-Turn EV 48 SD- No Batteries

Model Number: 997011

No Battery model

All other product details are the same- Does not Include the 4 FusionCore™ Quick Swap batteries.
Machine- Will need the minimum of 2-FusionCore™ Quick Swap batteries to operate.

DIMENSIONS

Length:	83"
Width W/O Chute:	50"
Height with ROPS:	72"
Weight:	1053 lbs.

Pro-Turn EV 52 SD

Model Number: 997006

Power

Brand:	FusionCore™
Type:	Lithium Ion
Power:	16 kWh total energy
Displacement:	4 – 4 kWh Quick Swap Batteries
Charging System:	12-hour Smart Charger

ENGINE DECK/FRAME

Drive Wheels / Tires:	Turf 22 x 12 – 12
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 2.5" tubular frame
Foot Plate:	Steel with extrusions to prevent slipping, flip up for ease of belt maintenance

DRIVE SYSTEM

Type:	Electric Drive
Transmission:	Next-Gen Wheel Drive- Brushless electric drive motor coupled with dual reduction planetary gearbox
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	NA
Brakes:	Mechanical lever parking brake with electric fail safe
Instrument Panel:	Mounted on the right-hand side of the operator, key switch, Eco-Mode, interactive display
Forward Speed Range:	Two Speed 0 – 11 mph and 0 – 8 mph
Reverse Speed Range:	0 – 5.5 mph

CUTTING DECK

Type:	Side Discharge Floating, adjustable, anti-scalping
Construction:	7-gauge steel with .25-inch spindle reinforcement X-Factor® 3 Fabricated Deck
Cutting Width:	52"
Cutting Height Adjustment:	Foot-operated pedal adjustment from operator's seat, Pin style selector makes it easy to change cutting height by simply placing a pin desired height of cut
Cutting Height:	1.5-5" in ¼" increments, 15 positions
Discharge Chute:	Flip-up, flexible rubber chute for strength and durability, minimizes damage to landscape and trees, and eases transport of the machine
Front Caster Wheels:	Smooth 13 x 6.5 – 6 pneumatic
Spindles:	X3 Constant Drive Spindle- Proprietary 3.5kWh spindle motors
Cutter Deck Belts:	NA
Blades:	3–18"
Blade Tip Speed:	17,000 fpm
Eco-Mode:	14,000 fpm

ADDITIONAL SPECIFICATIONS

ROPS:	Foldable ROPS is standard, retractable seatbelt included
Seat:	High Back Suspension Seat with adjustable arm rest
Cup Holder:	Molded into left fender
Paint:	Powder-coat paint

DIMENSIONS

Length:	83"
Width W/O Chute:	56"
Height with ROPS:	72"
Weight:	1284 lbs.

WARRANTY

Commercial:	5 Year or 1500 Hour Limited Commercial Warranty, No limit for first 2 years
Battery:	3 Year

OPTIONAL ACCESSORIES:

FusionCore Batteries	897001
Off Board Charger	897002
Fast Charger (6 hours)	797012
Operator Controlled Chute Baffle (Pro-Turn EV SD)	792216
LED Headlight Kit	797004
Mulching Kit (SD Only)	797019
High-Lift Blade Kit	797022
Safety Beacon	797005
Sunshade Hard Top	792180
Tweel Tire Kit	797029
Front Weight Kit	797024

Pro-Turn EV 52 SD- No Batteries

Model Number: 997012

No Battery model

All other product details are the same- Does not Include the 4 FusionCore™ Quick Swap batteries.
Machine- Will need the minimum of 2-FusionCore™ Quick Swap batteries to operate.

DIMENSIONS

Length:	83"
Width W/O Chute:	56"
Height with ROPS:	72"
Weight:	1076 lbs.

Pro-Turn EV 48 RD

Model Number: 997008

Power

Brand:	FusionCore™
Type:	Lithium Ion
Power:	16 kWh total energy
Displacement:	4 – 4 kWh Quick Swap Batteries
Charging System:	12-hour Smart Charger

ENGINE DECK/FRAME

Drive Wheels / Tires:	Turf 22 x 12 – 12
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 2.5" tubular frame
Foot Plate:	Steel with extrusions to prevent slipping, flip up for ease of belt maintenance

DRIVE SYSTEM

Type:	Electric Drive
Transmission:	Next-Gen Wheel Drive- Brushless electric drive motor coupled with dual reduction planetary gearbox
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	NA
Brakes:	Mechanical lever parking brake with electric fail safe
Instrument Panel:	Mounted on the right-hand side of the operator, key switch, Eco-Mode, interactive display
Forward Speed Range:	Two Speed 0 – 11 mph and 0 – 8 mph
Reverse Speed Range:	0 – 5.5 mph

CUTTING DECK

Type:	Rear Discharge Floating, adjustable, anti-scalping
Construction:	7-gauge steel with .25-inch spindle reinforcement X-Factor® 3 Fabricated Deck
Cutting Width:	48"
Cutting Height Adjustment:	Foot-operated pedal adjustment from operator's seat, Pin style selector makes it easy to change cutting height by simply placing a pin desired height of cut
Cutting Height:	1.5-5" in ¼" increments, 15 positions
Discharge Chute:	Flexible rubber chute for strength and durability, minimizes damage to landscape and trees, and eases transport of the machine
Front Caster Wheels:	Smooth 13 x 6.5 – 6 pneumatic
Spindles:	X3 Constant Drive Spindle- Proprietary 3.5kWh spindle motors
Cutter Deck Belts:	NA
Blades:	3–16.19"
Blade Tip Speed:	17,000 fpm
Eco-Mode:	14,000 fpm

ADDITIONAL SPECIFICATIONS

ROPS:	Foldable ROPS is standard, retractable seatbelt included
Seat:	High Back Suspension Seat with adjustable arm rest
Cup Holder:	Molded into left fender
Paint:	Powder-coat paint

DIMENSIONS

Length:	83"
Width:	50"
Height with ROPS:	72"
Weight:	1286 lbs.

WARRANTY

Commercial:	5 Year or 1500 Hour Limited Commercial Warranty, No limit for first 2 years
Battery:	3 Year

OPTIONAL ACCESSORIES:

FusionCore Batteries	897001
Off Board Charger	897002
Fast Charger (6 hours)	797012
LED Headlight Kit	797004
Safety Beacon	797005
Sunshade Hard Top	792180
Tweel Tire Kit	797029
Front Weight Kit	797024
High Lift Blade Kit	797027

Pro-Turn EV 48 RD- No Batteries

Model Number: 997014

No Battery model

All other product details are the same- Does not Include the 4 FusionCore™ Quick Swap batteries.
Machine- Will need the minimum of 2-FusionCore™ Quick Swap batteries to operate.

DIMENSIONS

Length:	83"
Width:	50"
Height with ROPS:	72"
Weight:	1053 lbs.

Pro-Turn EV 52 RD

Model Number: 997009

Power

Brand:	FusionCore™
Type:	Lithium Ion
Power:	16 kWh total energy
Displacement:	4 – 4 kWh Quick Swap Batteries
Charging System:	12-hour Smart Charger

ENGINE DECK/FRAME

Drive Wheels / Tires:	Turf 22 x 12 – 12
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 2.5" tubular frame
Foot Plate:	Steel with extrusions to prevent slipping, flip up for ease of belt maintenance

DRIVE SYSTEM

Type:	Electric Drive
Transmission:	Next-Gen Wheel Drive- Brushless electric drive motor coupled with dual reduction planetary gearbox
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	NA
Brakes:	Mechanical lever parking brake with electric fail safe
Instrument Panel:	Mounted on the right-hand side of the operator, key switch, Eco-Mode, interactive display
Forward Speed Range:	Two Speed 0 – 11 mph and 0 – 8 mph
Reverse Speed Range:	0 – 5.5 mph

CUTTING DECK

Type:	Rear Discharge Floating, adjustable, anti-scalping
Construction:	7-gauge steel with .25-inch spindle reinforcement X-Factor® 3 Fabricated Deck
Cutting Width:	52"
Cutting Height Adjustment:	Foot-operated pedal adjustment from operator's seat, Pin style selector makes it easy to change cutting height by simply placing a pin desired height of cut
Cutting Height:	1.5-5" in ¼" increments, 15 positions
Discharge Chute:	Flexible rubber chute for strength and durability, minimizes damage to landscape and trees, and eases transport of the machine
Front Caster Wheels:	Smooth 13 x 6.5 – 6 pneumatic
Spindles:	X3 Constant Drive Spindle- Proprietary 3.5kWh spindle motors
Cutter Deck Belts:	NA
Blades:	3–18"
Blade Tip Speed:	17,000 fpm
Eco-Mode:	14,000 fpm

ADDITIONAL SPECIFICATIONS

ROPS:	Foldable ROPS is standard, retractable seatbelt included
Seat:	High Back Suspension Seat with adjustable arm rest
Cup Holder:	Molded into left fender
Paint:	Powder-coat paint

DIMENSIONS

Length:	83"
Width:	54"
Height with ROPS:	72"
Weight:	1301 lbs.

WARRANTY

Commercial:	5 Year or 1500 Hour Limited Commercial Warranty, No limit for first 2 years
Battery:	3 Year

OPTIONAL ACCESSORIES:

FusionCore Batteries	897001
Off Board Charger	897002
Fast Charger (6 hours)	797012
LED Headlight Kit	797004
Safety Beacon	797005
Sunshade Hard Top	792180
Tweel Tire Kit	797029
Front Weight Kit	797024
High Lift Blade Kit	797026

Pro-Turn EV 52 RD- No Batteries

Model Number: 997015

No Battery model

All other product details are the same- Does not Include the 4 FusionCore™ Quick Swap batteries.
Machine- Will need the minimum of 2-FusionCore™ Quick Swap batteries to operate.

DIMENSIONS

Length:	83"
Width:	50"
Height with ROPS:	72"
Weight:	1076 lbs.

Pro-Turn EV 60 RD

Model Number: 997010

Power

Brand:	FusionCore™
Type:	Lithium Ion
Power:	16 kWh total energy
Displacement:	4 – 4 kWh Quick Swap Batteries
Charging System:	12-hour Smart Charger

ENGINE DECK/FRAME

Drive Wheels / Tires:	Turf 22 x 12 – 12
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 2.5" tubular frame
Foot Plate:	Steel with extrusions to prevent slipping, flip up for ease of belt maintenance

DRIVE SYSTEM

Type:	Electric Drive
Transmission:	Next-Gen Wheel Drive- Brushless electric drive motor coupled with dual reduction planetary gearbox
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	NA
Brakes:	Mechanical lever parking brake with electric fail safe
Instrument Panel:	Mounted on the right-hand side of the operator, key switch, Eco-Mode, interactive display
Forward Speed Range:	Two Speed 0 – 11 mph and 0 – 8 mph
Reverse Speed Range:	0 – 5.5 mph

CUTTING DECK

Type:	Rear Discharge Floating, adjustable, anti-scalping
Construction:	7-gauge steel with .25-inch spindle reinforcement X-Factor® 3 Fabricated Deck
Cutting Width:	60"
Cutting Height Adjustment:	Foot-operated pedal adjustment from operator's seat, Pin style selector makes it easy to change cutting height by simply placing a pin desired height of cut
Cutting Height:	1.5-5" in ¼" increments, 15 positions
Discharge Chute:	Flexible rubber chute for strength and durability, minimizes damage to landscape and trees, and eases transport of the machine
Front Caster Wheels:	Smooth 13 x 6.5 – 6 pneumatic
Spindles:	X3 Constant Drive Spindle- Proprietary 3.5kWh spindle motors
Cutter Deck Belts:	NA
Blades:	3–20.5"
Blade Tip Speed:	17,000 fpm
Eco-Mode:	14,000 fpm

ADDITIONAL SPECIFICATIONS

ROPS:	Foldable ROPS is standard, retractable seatbelt included
Seat:	High Back Suspension Seat with adjustable arm rest
Cup Holder:	Molded into left fender
Paint:	Powder-coat paint

DIMENSIONS

Length:	83"
Width:	64"
Height with ROPS:	72"
Weight:	1312 lbs.

WARRANTY

Commercial:	5 Year or 1500 Hour Limited Commercial Warranty, No limit for first 2 years
Battery:	3 Year

OPTIONAL ACCESSORIES:

FusionCore Batteries	897001
Off Board Charger	897002
Fast Charger (6 hours)	797012
LED Headlight Kit	797004
Safety Beacon	797005
Sunshade Hard Top	792180
Tweel Tire Kit	797029
Front Weight Kit	797024
High Lift Blade Kit	797026

Pro-Turn EV 60 RD- No Batteries

Model Number: 997016

No Battery model

All other product details are the same- Does not Include the 4 FusionCore™ Quick Swap batteries.
Machine- Will need the minimum of 2-FusionCore™ Quick Swap batteries to operate.

DIMENSIONS

Length:	83"
Width:	64"
Height with ROPS:	72"
Weight:	1104 lbs.

Pro-Stance EV 48 SD

Model Number: 998001

Power

Brand:	FusionCore™
Type:	Lithium Ion
Power:	16 kWh total energy
Displacement:	4 – 4 kWh Quick Swap Batteries
Charging System:	12-hour Smart Charger

ENGINE DECK/FRAME

Drive Wheels / Tires:	20 x 10.5-8 Turf
Parking Brake:	Button operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 2.5" tubular frame
Foot Platform:	Flip-up suspension platform with rubber isolators, guarantees all day standing comfort and allows you to easily convert this stand-on to a walk-behind

DRIVE SYSTEM

Type:	Electric Drive
Transmission:	Next-Gen Wheel Drive- Brushless electric drive motor coupled with dual reduction planetary gearbox
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	NA
Brakes:	Mechanical lever parking break with electric fail safe
Instrument Panel:	Mounted on the dash, key switch, Eco-Mode, interactive display
Forward Speed Range:	Two Speed 0 – 11 mph and 0 – 8 mph
Reverse Speed Range:	0 – 5.5 mph

CUTTING DECK

Type:	Side Discharge Floating, adjustable, anti-scalping
Construction:	7-gauge steel with .25-inch spindle reinforcement X-Factor® 3 Fabricated Deck
Cutting Width:	48"
Cutting Height Adjustment:	Hand and Foot-operated pedal adjustment from operator's platform, Pin style selector makes it easy to change cutting height by simply placing a pin desired height of cut
Cutting Height:	1.5-5" in ¼" increments, 15 positions
Discharge Chute:	Flip-up, flexible rubber chute for strength and durability, minimizes damage to landscape and trees, and eases transport of the machine
Front Caster Wheels:	Smooth 13 x 6.5-6 Semi-Pneumatic
Spindles:	X3 Constant Drive Spindle- Proprietary 3.5kWh spindle motors
Cutter Deck Belts:	NA
Blades:	3–16.19"
Blade Tip Speed:	17,000 fpm
Eco-Mode Speed:	14,000 fpm

ADDITIONAL SPECIFICATIONS

Cup Holder:	Molded into left side of operator tower
Paint:	Powder-coat paint

DIMENSIONS

Length:	74.5"
Width W/O Chute:	50"
Height:	46"
Weight:	1204 lbs.

WARRANTY

Commercial:	5 Year or 1500 Hour Limited Commercial Warranty, No limit for first 2 years
Battery:	3 Year

OPTIONAL ACCESSORIES:

FusionCore Batteries	897001
Off Board Charger	897002
Fast Charger (6 hours)	797012
Poly Side Catcher	794048
Mulching Kit (SD Only)	797018
Semi-Pneumatic Tire Kit	797034
Front Light Bar	798004

Pro-Stance EV 48 SD- No Batteries

Model Number: 998007

No Battery model

All other product details are the same- Does not Include the 4 FusionCore™ Quick Swap batteries.
Machine- Will need the minimum of 2-FusionCore™ Quick Swap batteries to operate.

DIMENSIONS

Length:	74.5"
Width W/O Chute:	50"
Height:	46"
Weight:	996 lbs.

Pro-Stance EV 52 SD

Model Number: 998002

Power

Brand:	FusionCore™
Type:	Lithium Ion
Power:	16 kWh total energy
Displacement:	4 – 4 kWh Quick Swap Batteries
Charging System:	12-hour Smart Charger

ENGINE DECK/FRAME

Drive Wheels / Tires:	20 x 10.5-8 Turf
Parking Brake:	Button operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 2.5" tubular frame
Foot Platform:	Flip-up suspension platform with rubber isolators, guarantees all day standing comfort and allows you to easily convert this stand-on to a walk-behind

DRIVE SYSTEM

Type:	Electric Drive
Transmission:	Next-Gen Wheel Drive- Brushless electric drive motor coupled with dual reduction planetary gearbox
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	NA
Brakes:	Mechanical lever parking break with electric fail safe
Instrument Panel:	Mounted on the dash, key switch, Eco-Mode, interactive display
Forward Speed Range:	Two Speed 0 – 11 mph and 0 – 8 mph
Reverse Speed Range:	0 – 5.5 mph

CUTTING DECK

Type:	Side Discharge Floating, adjustable, anti-scalping
Construction:	7-gauge steel with .25-inch spindle reinforcement X-Factor® 3 Fabricated Deck
Cutting Width:	52"
Cutting Height Adjustment:	Hand and Foot-operated pedal adjustment from operator's platform, pin style selector makes it easy to change cutting height by simply placing a pin desired height of cut
Cutting Height:	1.5-5" in ¼" increments, 15 positions
Discharge Chute:	Flip-up, flexible rubber chute for strength and durability, minimizes damage to landscape and trees, and eases transport of the machine
Front Caster Wheels:	Smooth 13 x 6.5-6 Semi-Pneumatic
Spindles:	X3 Constant Drive Spindle- Proprietary 3.5kWh spindle motors
Cutter Deck Belts:	NA
Blades:	3–18"
Blade Tip Speed:	17,000 fpm
Eco-Mode Speed:	14,000 fpm

ADDITIONAL SPECIFICATIONS

Cup Holder:	Molded into left side of operator tower
Paint:	Powder-coat paint

DIMENSIONS

Length:	74.5"
Width W/O Chute:	56"
Height:	46"
Weight:	1240 lbs.

WARRANTY

Commercial:	5 Year or 1500 Hour Limited Commercial Warranty, No limit for first 2 years
Battery:	3 Year

OPTIONAL ACCESSORIES:

FusionCore Batteries	897001
Off Board Charger	897002
Fast Charger (6 hours)	797012
Poly Side Catcher	794048
Mulching Kit (SD Only)	798001
Semi-Pneumatic Tire Kit	797034
Front Light Bar	798004

Pro-Stance EV 52 SD- No Batteries

Model Number: 998008

No Battery model

All other product details are the same- Does not Include the 4 FusionCore™ Quick Swap batteries.
Machine- Will need the minimum of 2-FusionCore™ Quick Swap batteries to operate.

DIMENSIONS

Length:	74.5"
Width W/O Chute:	56"
Height:	46"
Weight:	1032 lbs.

Pro-Stance EV 60 SD

Model Number: 998003

Power

Brand:	FusionCore™
Type:	Lithium Ion
Power:	16 kWh total energy
Displacement:	4 – 4 kWh Quick Swap Batteries
Charging System:	12-hour Smart Charger

ENGINE DECK/FRAME

Drive Wheels / Tires:	20 x 10.5-8 Turf
Parking Brake:	Button operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 2.5" tubular frame
Foot Platform:	Flip-up suspension platform with rubber isolators, guarantees all day standing comfort and allows you to easily convert this stand-on to a walk-behind

DRIVE SYSTEM

Type:	Electric Drive
Transmission:	Next-Gen Wheel Drive- Brushless electric drive motor coupled with dual reduction planetary gearbox
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	NA
Brakes:	Mechanical lever parking break with electric fail safe
Instrument Panel:	Mounted on the dash, key switch, Eco-Mode, interactive display
Forward Speed Range:	Two Speed 0 – 11 mph and 0 – 8 mph
Reverse Speed Range:	0 – 5.5 mph

CUTTING DECK

Type:	Side Discharge Floating, adjustable, anti-scalping
Construction:	7-gauge steel with .25-inch spindle reinforcement X-Factor® 3 Fabricated Deck
Cutting Width:	60"
Cutting Height Adjustment:	Hand and Foot-operated pedal adjustment from operator's platform, pin style selector makes it easy to change cutting height by simply placing a pin desired height of cut
Cutting Height:	1.5-5" in ¼" increments, 15 positions
Discharge Chute:	Flip-up, flexible rubber chute for strength and durability, minimizes damage to landscape and trees, and eases transport of the machine
Front Caster Wheels:	Smooth 13 x 6.5-6 Semi-Pneumatic
Spindles:	X3 Constant Drive Spindle- Proprietary 3.5kWh spindle motors
Cutter Deck Belts:	NA
Blades:	3–20.5"
Blade Tip Speed:	17,000 fpm
Eco-Mode Speed:	14,000 fpm

ADDITIONAL SPECIFICATIONS

Cup Holder:	Molded into left side of operator tower
Paint:	Powder-coat paint

DIMENSIONS

Length:	74.5"
Width W/O Chute:	63"
Height:	46"
Weight:	1265 lbs.

WARRANTY

Commercial:	5 Year or 1500 Hour Limited Commercial Warranty, No limit for first 2 years
Battery:	3 Year

OPTIONAL ACCESSORIES:

FusionCore Batteries	897001
Off Board Charger	897002
Fast Charger (6 hours)	797012
Poly Side Catcher	794048
Mulching Kit (SD Only)	798002
60" High-Lift Blade Kit	797020
Semi-Pneumatic Tire Kit	797034
Front Light Bar	798004

Pro-Stance EV 60 SD- No Batteries

Model Number: 998009

No Battery model

All other product details are the same- Does not Include the 4 FusionCore™ Quick Swap batteries.
Machine- Will need the minimum of 2-FusionCore™ Quick Swap batteries to operate.

DIMENSIONS

Length:	74.5"
Width W/O Chute:	63"
Height:	46"
Weight:	1057 lbs.

Pro-Stance EV 48 RD

Model Number: 998004

Power

Brand:	FusionCore™
Type:	Lithium Ion
Power:	16 kWh total energy
Displacement:	4 – 4 kWh Quick Swap Batteries
Charging System:	12-hour Smart Charger

ENGINE DECK/FRAME

Drive Wheels / Tires:	20 x 10.5-8 Turf
Parking Brake:	Button operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 2.5" tubular frame
Foot Platform:	Flip-up suspension platform with rubber isolators, guarantees all day standing comfort and allows you to easily convert this stand-on to a walk-behind

DRIVE SYSTEM

Type:	Electric Drive
Transmission:	Next-Gen Wheel Drive- Brushless electric drive motor coupled with dual reduction planetary gearbox
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	NA
Brakes:	Mechanical lever parking break with electric fail safe
Instrument Panel:	Mounted on the dash, key switch, Eco-Mode, interactive display
Forward Speed Range:	Two Speed 0 – 11 mph and 0 – 8 mph
Reverse Speed Range:	0 – 5.5 mph

CUTTING DECK

Type:	Rear Discharge Floating, adjustable, anti-scalping
Construction:	7-gauge steel with .25-inch spindle reinforcement X-Factor® 3 Fabricated Deck
Cutting Width:	48"
Cutting Height Adjustment:	Hand and Foot-operated pedal adjustment from operator's platform, pin style selector makes it easy to change cutting height by simply placing a pin desired height of cut
Cutting Height:	1.5-5" in ¼" increments, 15 positions
Discharge Chute:	Flexible rubber chute for strength and durability, minimizes damage to landscape and trees, and eases transport of the machine
Front Caster Wheels:	Smooth 13 x 6.5-6 Semi-Pneumatic
Spindles:	X3 Constant Drive Spindle- Proprietary 3.5kWh spindle motors
Cutter Deck Belts:	NA
Blades:	3–20.5"
Blade Tip Speed:	17,000 fpm
Eco-Mode Speed:	14,000 fpm

ADDITIONAL SPECIFICATIONS

Cup Holder:	Molded into left side of operator tower
Paint:	Powder-coat paint

DIMENSIONS

Length:	74.5"
Width:	50"
Height:	46"
Weight:	1203 lbs.

WARRANTY

Commercial:	5 Year or 1500 Hour Limited Commercial Warranty, No limit for first 2 years
Battery:	3 Year

OPTIONAL ACCESSORIES:

FusionCore Batteries	897001
Off Board Charger	897002
Fast Charger (6 hours)	797012
Semi-Pneumatic Tire Kit	797034
Front Light Bar	798004

Pro-Stance EV 48 RD- No Batteries

Model Number: 998010

No Battery model

All other product details are the same- Does not Include the 4 FusionCore™ Quick Swap batteries.
Machine- Will need the minimum of 2-FusionCore™ Quick Swap batteries to operate.

DIMENSIONS

Length:	74.5"
Width:	50"
Height:	46"
Weight:	995 lbs.

Pro-Stance EV 52 RD

Model Number: 998005

Power

Brand:	FusionCore™
Type:	Lithium Ion
Power:	16 kWh total energy
Displacement:	4 – 4 kWh Quick Swap Batteries
Charging System:	12-hour Smart Charger

ENGINE DECK/FRAME

Drive Wheels / Tires:	20 x 10.5-8 Turf
Parking Brake:	Button operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 2.5" tubular frame
Foot Platform:	Flip-up suspension platform with rubber isolators, guarantees all day standing comfort and allows you to easily convert this stand-on to a walk-behind

DRIVE SYSTEM

Type:	Electric Drive
Transmission:	Next-Gen Wheel Drive- Brushless electric drive motor coupled with dual reduction planetary gearbox
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	NA
Brakes:	Mechanical lever parking break with electric fail safe
Instrument Panel:	Mounted on the dash, key switch, Eco-Mode, interactive display
Forward Speed Range:	Two Speed 0 – 11 mph and 0 – 8 mph
Reverse Speed Range:	0 – 5.5 mph

CUTTING DECK

Type:	Rear Discharge Floating, adjustable, anti-scalping
Construction:	7-gauge steel with .25-inch spindle reinforcement X-Factor® 3 Fabricated Deck
Cutting Width:	48"
Cutting Height Adjustment:	Hand and Foot-operated pedal adjustment from operator's platform, pin style selector makes it easy to change cutting height by simply placing a pin desired height of cut
Cutting Height:	1.5-5" in ¼" increments, 15 positions
Discharge Chute:	Flexible rubber chute for strength and durability, minimizes damage to landscape and trees, and eases transport of the machine
Front Caster Wheels:	Smooth 13 x 6.5-6 Semi-Pneumatic
Spindles:	X3 Constant Drive Spindle- Proprietary 3.5kWh spindle motors
Cutter Deck Belts:	NA
Blades:	3–18"
Blade Tip Speed:	17,000 fpm
Eco-Mode Speed:	14,000 fpm

ADDITIONAL SPECIFICATIONS

Cup Holder:	Molded into left side of operator tower
Paint:	Powder-coat paint

DIMENSIONS

Length:	74.5"
Width:	54"
Height:	46"
Weight:	1236 lbs.

WARRANTY

Commercial:	5 Year or 1500 Hour Limited Commercial Warranty, No limit for first 2 years
Battery:	3 Year

OPTIONAL ACCESSORIES:

FusionCore Batteries	897001
Off Board Charger	897002
Fast Charger (6 hours)	797012
Semi-Pneumatic Tire Kit	797034
Front Light Bar	798004

Pro-Stance EV 52 RD- No Batteries

Model Number: 998011

No Battery model

All other product details are the same- Does not Include the 4 FusionCore™ Quick Swap batteries.
Machine- Will need the minimum of 2-FusionCore™ Quick Swap batteries to operate.

DIMENSIONS

Length:	74.5"
Width:	54"
Height:	46"
Weight:	1028 lbs.

Pro-Stance EV 60 RD

Model Number: 998006

Power

Brand:	FusionCore™
Type:	Lithium Ion
Power:	16 kWh total energy
Displacement:	4 – 4 kWh Quick Swap Batteries
Charging System:	12-hour Smart Charger

ENGINE DECK/FRAME

Drive Wheels / Tires:	20 x 10.5-8 Turf
Parking Brake:	Button operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 2.5" tubular frame
Foot Platform:	Flip-up suspension platform with rubber isolators, guarantees all day standing comfort and allows you to easily convert this stand-on to a walk-behind

DRIVE SYSTEM

Type:	Electric Drive
Transmission:	Next-Gen Wheel Drive- Brushless electric drive motor coupled with dual reduction planetary gearbox
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	NA
Brakes:	Mechanical lever parking break with electric fail safe
Instrument Panel:	Mounted on the dash, key switch, Eco-Mode, interactive display
Forward Speed Range:	Two Speed 0 – 11 mph and 0 – 8 mph
Reverse Speed Range:	0 – 5.5 mph

CUTTING DECK

Type:	Rear Discharge Floating, adjustable, anti-scalping
Construction:	7-gauge steel with .25-inch spindle reinforcement X-Factor® 3 Fabricated Deck
Cutting Width:	48"
Cutting Height Adjustment:	Hand and Foot-operated pedal adjustment from operator's platform, pin style selector makes it easy to change cutting height by simply placing a pin desired height of cut
Cutting Height:	1.5-5" in ¼" increments, 15 positions
Discharge Chute:	Flexible rubber chute for strength and durability, minimizes damage to landscape and trees, and eases transport of the machine
Front Caster Wheels:	Smooth 13 x 6.5-6 Semi-Pneumatic
Spindles:	X3 Constant Drive Spindle- Proprietary 3.5kWh spindle motors
Cutter Deck Belts:	NA
Blades:	3–18"
Blade Tip Speed:	17,000 fpm
Eco-Mode Speed:	14,000 fpm

ADDITIONAL SPECIFICATIONS

Cup Holder:	Molded into left side of operator tower
Paint:	Powder-coat paint

DIMENSIONS

Length:	74.5"
Width:	62"
Height:	46"
Weight:	1264 lbs.

WARRANTY

Commercial:	5 Year or 1500 Hour Limited Commercial Warranty, No limit for first 2 years
Battery:	3 Year

OPTIONAL ACCESSORIES:

FusionCore Batteries	897001
Off Board Charger	897002
Fast Charger (6 hours)	797012
Semi-Pneumatic Tire Kit	797034
Front Light Bar	798004

Pro-Stance EV 60 RD- No Batteries

Model Number: 998012

No Battery model

All other product details are the same- Does not Include the 4 FusionCore™ Quick Swap batteries.
Machine- Will need the minimum of 2-FusionCore™ Quick Swap batteries to operate.

DIMENSIONS

Length:	74.5"
Width:	62"
Height:	46"
Weight:	1028 lbs.

Pro-Turn 652

Model Number: 992500

ENGINE

Brand:	Kawasaki®
Model:	FX850
Horsepower:	27
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	852 cc
Cylinder:	Cast-iron cylinder liners
Air Cleaner:	Dual stage canister air filter
Starter/Electrical:	Electric Ignition
Charging System:	15 amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	12.7 GAL
Drive Wheels / Tires:	26 x 12 – 16 low pro tires
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 3.0" tubular frame
Foot Plate:	Steel with extrusions to prevent slipping, with 2 mounted rubber isolators to reduce vibration

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Parker HTG
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting, self-tightening
Brakes:	Lever actuated wet disc brake, internal to transmission, assures maximum brake-holding capacity
Axles:	Tough 1.375-inch shaft for maximum strength
Instrument Panel:	Mounted on the right-hand side of the operator, key switch, throttle, manual choke, BBC switch, electric fuel gauge, hour meter with maintenance reminders
Forward Speed Range:	0 - 15 mph
Reverse Speed Range:	0 - 6 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalp wheels
Construction:	7-gauge steel with .25-inch spindle reinforcement
Cutting Width:	X-Factor 3 Fabricated Deck
Cutting Height Adjustment:	52"
Cutting Height:	Foot-operated pedal adjustment from operator's seat, dial height of cut makes it easy to change cutting height by simply rotating the dial to the desired height of cut
Blade Engagement:	1-5.5" in ¼" increments, 19 positions
Discharge Chute:	Ogura® GT3.5 Electric Clutch
Front Caster Wheels:	Flip up, flexible rubber chute for strength and durability, minimizes damage to landscape and trees and eases transport of the machine
Spindles:	15 x 6 – 6 semi-pneumatic
Spindle Pulleys:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Constant Belt Tension System:	Split steel design for strength and durability
Cutter Deck Belts:	The CBT system, exclusive to Gravely, ensures constant belt tension and consistent blade tip speed
Blades:	V Belt
Blade Tip Speed:	3–18"
	18,229 fpm

ADDITIONAL SPECIFICATIONS

ROPS:	Foldable ROPS is standard, retractable seatbelt included
Seat:	High Bolstered Sporty Seat
Suspension:	Full Pod suspension
Cup	Holder: Molded into left fuel tank
Paint:	Powder-coat paint
12V Power Port:	Located on left hand control panel

DIMENSIONS

Length:	83"
Width:	63"
Width (with discharge in transport position):	55.5"
Height with ROPS:	71.5"
Weight:	1535 lbs.

WARRANTY

Commercial:	5 Year or 1500 Hour Limited Commercial Warranty (No hour limit first two years)
Frame and Deck shell:	Limited Lifetime Frame and Deck shell Warranty

OPTIONAL ACCESSORIES:

3 Bucket Powered Bagger	892053
Dump from Seat Bagger (14.5 Bu.)	892054
Mulching Kit	792202
Trailer Hitch Kit	792158
Headlight Kit	792209
Operator Controlled Discharge Baffle	792216
Bagger Mounting Kit	792212
Tweel Kit	792205
Laser Edge Blades	792193
Laser Edge Mulch Blade	792199
Equipment Cover	715153

Pro-Turn 660

Model Number: 992501

ENGINE

Brand:	Kawasaki®
Model:	FX1000V
Horsepower:	35
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	999 cc
Cylinder:	Cast-iron cylinder liners
Air Cleaner:	Dual stage canister air filter
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	12.7 GAL
Drive Wheels / Tires:	26 x 12 – 16 low pro tires
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 3.0" tubular frame
Foot Plate:	Steel with extrusions to prevent slipping, with 2 mounted rubber isolators to reduce vibration

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Parker HTG
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting, self-tightening
Brakes:	Lever actuated wet disc brake, internal to transmission, assures maximum brake-holding capacity
Axles:	Tough 1.375-inch shaft for maximum strength
Instrument Panel:	Mounted on the right-hand side of the operator, key switch, throttle, BBC switch, electric fuel gauge, hour meter with maintenance reminders
Forward Speed Range:	0 – 15 mph
Reverse Speed Range:	0 – 6 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	7-gauge steel with .25-inch spindle reinforcement
Cutting Width:	X-Factor 3 Fabricated Deck
Cutting Height Adjustment:	60"
Cutting Height:	Foot-operated pedal adjustment from operator's seat, dial height of cut makes it easy to change cutting height by simply rotating the dial to the desired height of cut
Blade Engagement:	1-5.5" in ¼" increments, 19 positions
Discharge Chute:	Ogura® GT3.5 Electric Clutch
Front Caster Wheels:	Flip-up, flexible rubber chute for strength and durability, minimizes damage to landscape and trees, and eases transport of the machine
Spindles:	15 x 6 – 6 Semi-pneumatic
Spindle Pulleys:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Constant Belt Tension System:	Split steel design for strength and durability
Cutter Deck Belts:	The CBT system, exclusive to Gravely, ensures constant belt tension and consistent blade tip speed
Blades:	V-Belt
Blade Tip Speed:	3–20.5"
	18,348 fpm

ADDITIONAL SPECIFICATIONS

ROPS:	Foldable ROPS is standard, retractable seatbelt included
Seat:	High Bolstered Sporty Seat
Suspension:	Full Pod suspension
Cup Holder:	Molded into left fuel tank
Paint:	Powder-coat paint
12V Power Port:	Located on left hand control panel

DIMENSIONS

Length:	83"
Width:	75"
Width (with discharge in transport position):	63"
Height with ROPS:	71.5"
Weight:	1586 lbs.

WARRANTY

Commercial:	5 Year or 1500 Hour Limited Commercial Warranty (No hour limit first two years)
Frame and Deck shell:	Limited Lifetime Frame and Deck shell Warranty

OPTIONAL ACCESSORIES:

3 Bucket Powered Bagger	892053
Dump from Seat Bagger (14.5 Bu.)	892054
Mulching Kit	792203
Trailer Hitch Kit	792158
Headlight Kit	792209
Operator Controlled Discharge Baffle	792216
Bagger Mounting Kit	792213
Tweel Kit	792205
Laser Edge Blades	792194
Laser Edge Mulch Blade	792200
Equipment Cover	715153

Pro-Tum 660 EFI

Model Number: 992503

ENGINE

Brand:	Kawasaki®
Model:	FX1000V EFI
Horsepower:	38.5
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	999 cc
Cylinder:	Cast-iron cylinder liners
Air Cleaner:	Dual stage canister air filter
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	12.7 GAL
Drive Wheels / Tires:	26 x 12 – 16 low pro tires
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 3.0" tubular frame
Foot Plate:	Steel with extrusions to prevent slipping, with 2 mounted rubber isolators to reduce vibration

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Parker HTG
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting, self-tightening
Brakes:	Lever actuated wet disc brake, internal to transmission, assures maximum brake-holding capacity
Axles:	Tough 1.375-inch shaft for maximum strength
Instrument Panel:	Mounted on the right-hand side of the operator, key switch, throttle, BBC switch, electric fuel gauge, hour meter with maintenance reminders
Forward Speed Range:	0 – 15 mph
Reverse Speed Range:	0 – 6 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	7-gauge steel with .25-inch spindle reinforcement
Cutting Width:	X-Factor 3 Fabricated Deck
Cutting Height Adjustment:	60"
Cutting Height:	Foot-operated pedal adjustment from operator's seat, dial height of cut makes it easy to change cutting height by simply rotating the dial to the desired height of cut
Blade Engagement:	1-5.5" in ¼" increments, 19 positions
Discharge Chute:	Ogura® GT3.5 Electric Clutch
Front Caster Wheels:	Flip-up, flexible rubber chute for strength and durability, minimizes damage to landscape and trees, and eases transport of the machine
Spindles:	15 x 6 – 6 Semi-pneumatic
Spindle Pulleys:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Constant Belt Tension System:	Split steel design for strength and durability
Cutter Deck Belts:	The CBT system, exclusive to Gravely, ensures constant belt tension and consistent blade tip speed
Blades:	V-Belt
Blade Tip Speed:	3–20.5"
	18,633 fpm

ADDITIONAL SPECIFICATIONS

ROPS:	Foldable ROPS is standard, retractable seatbelt included
Seat:	High Bolstered Sporty Seat
Suspension:	Full Pod suspension
Cup Holder:	Molded into left fuel tank
Paint:	Powder-coat paint
12V Power Port:	Located on left hand control panel

DIMENSIONS

Length:	83"
Width:	75"
Width (with discharge in transport position):	63"
Height with ROPS:	71"
Weight:	1601 lbs.

WARRANTY

Commercial:	5 Year or 1500 Hour Limited Commercial Warranty (No hour limit first two years)
Frame and Deck shell:	Limited Lifetime Frame and Deck shell Warranty

OPTIONAL ACCESSORIES:

3 Bucket Powered Bagger	892053
Dump from seat bagger (14.5 bu.)	892054
Mulching Kit	792203
Trailer Hitch Kit	792158
Headlight Kit	792209
Operator Controlled Discharge Baffle	792216
Bagger Mounting Kit	792213
Tweel Kit	792205
Laser Edge Blades	792194
Laser Edge Mulch Blade	792200
Equipment Cover	715153

Pro-Turn 672

Model Number: 992502

ENGINE

Brand:	Kawasaki®
Model:	FX1000V
Horsepower:	35
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	999 cc
Cylinder:	Cast-iron cylinder liners
Air Cleaner:	Multi-Stage canister air filter
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	12.7 GAL
Drive Wheels / Tires:	26 x 12 – 16 low pro tires
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 3.0" tubular frame
Foot Plate:	Steel with extrusions to prevent slipping, with 2 mounted rubber isolators to reduce vibration

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Parker HTG
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting, self-tightening
Brakes:	Lever actuated wet disc brake, internal to transmission, assures maximum brake-holding capacity
Axles:	Tough 1.375-inch shaft for maximum strength
Instrument Panel:	Mounted on the right-hand side of the operator, key switch, throttle, BBC switch, electric fuel gauge, hour meter with maintenance reminders
Forward Speed Range:	0 – 15 mph
Reverse Speed Range:	0 – 6 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	7-gauge steel with .25-inch spindle reinforcement
Cutting Width:	X-Factor 3 Fabricated Deck
Cutting Height Adjustment:	72"
Cutting Height:	Foot-operated pedal adjustment from operator's seat, dial height of cut makes it easy to change cutting height by simply rotating the dial to the desired height of cut
Blade Engagement:	1-5.5" in ¼" increments, 19 positions
Discharge Chute:	Ogura® GT3.5 Electric Clutch
Front Caster Wheels:	Flip-up, flexible rubber chute for strength and durability, minimizes damage to landscape and trees, and eases transport of the machine
Spindles:	15 x 6 – 6 Semi-pneumatic
Spindle Pulleys:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Constant Belt Tension System:	Split steel design for strength and durability
Cutter Deck Belts:	The CBT system, exclusive to Gravely, ensures constant belt tension and consistent blade tip speed
Blades:	V-Belt
Blade Tip Speed:	3–24.5"
	18,633 fpm

ADDITIONAL SPECIFICATIONS

ROPS:	Foldable ROPS is standard, retractable seatbelt included
Seat:	High Bolstered Sporty Seat
Suspension:	Full Pod suspension
Cup Holder:	Molded into left fuel tank
Paint:	Powder-coat paint
12V Power Port:	Located on left hand control panel

DIMENSIONS

Length:	83"
Width:	87"
Width (with discharge in transport position):	75"
Height with ROPS:	71"
Weight:	1646 lbs.

WARRANTY

Commercial:	5 Year or 1500 Hour Limited Commercial Warranty (No hour limit first two years)
Frame and Deck shell:	Limited Lifetime Frame and Deck shell Warranty

OPTIONAL ACCESSORIES:

3 Bucket Powered Bagger	892053
Dump from seat bagger (14.5 bu.)	892054
Mulching Kit	792204
Trailer Hitch Kit	792158
Headlight Kit	792209
Bagger Mounting Kit	792214
Tweel Kit	792205
Laser Edge Blades	792195
Equipment Cover	715153

Pro-Tum 672 EFI

Model Number: 992504

ENGINE

Brand:	Kawasaki®
Model:	FX1000V EFI
Horsepower:	38.5
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	999 cc
Cylinder:	Cast-iron cylinder liners
Air Cleaner:	Multi-Stage canister air filter
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	12.7 GAL
Drive Wheels / Tires:	26 x 12 – 16 low pro tires
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 3.0" tubular frame
Foot Plate:	Steel with extrusions to prevent slipping, with 2 mounted rubber isolators to reduce vibration

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Parker HTG
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting, self-tightening
Brakes:	Lever actuated wet disc brake, internal to transmission, assures maximum brake-holding capacity
Axles:	Tough 1.375-inch shaft for maximum strength
Instrument Panel:	Mounted on the right-hand side of the operator, key switch, throttle, BBC switch, electric fuel gauge, hour meter with maintenance reminders
Forward Speed Range:	0 – 15 mph
Reverse Speed Range:	0 – 6 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	7-gauge steel with .25-inch spindle reinforcement
Cutting Width:	X-Factor 3 Fabricated Deck
Cutting Height Adjustment:	72"
Cutting Height:	Foot-operated pedal adjustment from operator's seat, dial height of cut makes it easy to change cutting height by simply rotating the dial to the desired height of cut
Blade Engagement:	1-5.5" in ¼" increments, 19 positions
Discharge Chute:	Ogura® GT3.5 Electric Clutch
Front Caster Wheels:	Flip-up, flexible rubber chute for strength and durability, minimizes damage to landscape and trees, and eases transport of the machine
Spindles:	15 x 6 – 6 Semi-pneumatic
Spindle Pulleys:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Constant Belt Tension System:	Split steel design for strength and durability
Cutter Deck Belts:	The CBT system, exclusive to Gravely, ensures constant belt tension and consistent blade tip speed
Blades:	V-Belt
Blade Tip Speed:	3–24.5"
	18,229 fpm

ADDITIONAL SPECIFICATIONS

ROPS:	Foldable ROPS is standard, retractable seatbelt included
Seat:	High Bolstered Sporty Seat
Suspension:	Full Pod suspension
Cup Holder:	Molded into left fuel tank
Paint:	Powder-coat paint
12V Power Port:	Located on left hand control panel

DIMENSIONS

Length:	83"
Width:	87"
Width (with discharge in transport position):	75"
Height with ROPS:	71.5"
Weight:	1661 lbs.

WARRANTY

Commercial:	5 Year or 1500 Hour Limited Commercial Warranty (No hour limit first two years)
Frame and Deck shell:	Limited Lifetime Frame and Deck shell Warranty

OPTIONAL ACCESSORIES:

3 Bucket Powered Bagger	892053
Dump from seat bagger (14.5 bu.)	892054
Mulching Kit	792204
Trailer Hitch Kit	792158
Headlight Kit	792209
Bagger Mounting Kit	792214
Tweel Kit	792205
Laser Edge Blades	792195
Equipment Cover	715153

Pro-Turn Mach-One

Model Number: 992515

ENGINE

Brand:	Kawasaki®
Model:	FX921V
Horsepower:	31
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	999 cc
Cylinder:	Cast-iron cylinder bores
Air Cleaner:	Dual stage canister air filter
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	12.5 GAL
Drive Wheels / Tires:	26 x 12 – 16 Radial Turf
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 3.0" tubular frame
Foot Plate:	Steel with extrusions to prevent slipping, flip up for ease of belt maintenance

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Parker HTG
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting, self-tightening
Brakes:	Lever actuated wet disc brake, internal to transmission, assures maximum brake-holding capacity
Axles:	Tough 1.375-inch shaft for maximum strength
Instrument Panel:	Mounted on the right-hand side of the operator, key switch, throttle, PTO switch, hour meter with maintenance reminders
Forward Speed Range:	0 – 15 mph
Reverse Speed Range:	0 – 6 mph

CUTTING DECK

Type:	Unique tunnel design directs clippings away from the blades eliminating the blades from being bogged down ensuring clean crisp cut with even dispersion.
Construction:	7-gauge steel with .25-inch spindle reinforcement
Cutting Width:	60"
Cutting Height Adjustment:	Foot-operated pedal adjustment from operator's seat, dial height of cut makes it easy to change cutting height by simply rotating the dial to the desired height of cut
Cutting Height:	1.5-5.5" in ¼" increments, 17 positions
Blade Engagement:	Ogura® GT3.5 Electric Clutch
Discharge Chute:	Flip-up, flexible rubber chute for strength and durability, minimizes damage to landscape and trees, and eases transport of the machine
Front Caster Wheels:	15 x 6 – 6 Semi-pneumatic
Spindles:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Spindle Pulleys:	Split steel design for strength and durability
Constant Belt Tension System:	The CBT system, exclusive to Gravely, ensures constant belt tension and consistent blade tip speed
Cutter Deck Belts:	V-Belt
Blades:	3–20.5"
Blade Tip Speed:	18,229 fpm

ADDITIONAL SPECIFICATIONS

ROPS:	Foldable ROPS is standard, retractable seatbelt included
Seat:	High Back w/ Full Suspension
Cup Holder:	Molded into left fuel tank
Paint:	Powder-coat paint

DIMENSIONS

Length:	86.2"
Width:	74.6"
Width (with discharge in transport position):	61"
Height with ROPS:	75"
Weight:	1486 lbs.

WARRANTY

Commercial:	5 Year or 1500 Hour Limited Commercial Warranty (No hour limit first two years)
Frame and deck shell:	Limited Lifetime Frame and deck shell Warranty

OPTIONAL ACCESSORIES:

Trailer Hitch Kit	792158
LED Headlight Kit	792229
Air Ride Seat	792228
LaserEdge Blade Kit	792224
Engine Maintenance Kit	707216
Equipment Cover	715153

Pro-Tum 572 EFI

Model Number: 992512

ENGINE

Brand:	Kawasaki®
Model:	FX921 EFI
Horsepower:	31
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	999 cc
Cylinder:	Cast-iron cylinder bores
Air Cleaner:	Dual stage canister air filter
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	12.5 GAL
Drive Wheels / Tires:	26 x 12 – 16 Radial Turf
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 3.0" tubular frame
Foot Plate:	Steel with extrusions to prevent slipping, with 2 mounted rubber isolators to reduce vibration

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Parker HTG
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting, self-tightening
Brakes:	Lever actuated wet disc brake, internal to transmission, assures maximum brake-holding capacity
Axles:	Tough 1.375-inch shaft for maximum strength
Instrument Panel:	Mounted on the right-hand side of the operator, key switch, throttle, BBC switch, fuel gauge, hour meter with maintenance reminders
Forward Speed Range:	0 – 15 mph
Reverse Speed Range:	0 – 6 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	7-gauge steel with .25-inch spindle reinforcement
Cutting Width:	X-Factor 3 Fabricated Deck
Cutting Height Adjustment:	72"
Cutting Height:	Foot-operated pedal adjustment from operator's seat, dial height of cut makes it easy to change cutting height by simply rotating the dial to the desired height of cut
Blade Engagement:	1-5.5" in ¼" increments, 19 positions
Discharge Chute:	Ogura® GT3.5 Electric Clutch
Front Caster Wheels:	Flip-up, flexible rubber chute for strength and durability, minimizes damage to landscape and trees, and eases transport of the machine
Spindles:	15 x 6 – 6 Semi-pneumatic
Spindle Pulleys:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Constant Belt Tension System:	Split steel design for strength and durability
Cutter Deck Belts:	The CBT system, exclusive to Gravely, ensures constant belt tension and consistent blade tip speed
Blades:	V-Belt
Blade Tip Speed:	3–24.5"
	18,229 fpm

ADDITIONAL SPECIFICATIONS

ROPS:	Foldable ROPS is standard, retractable seatbelt included
Seat:	Air Ride suspension with a plush seat and arm rests
Cup Holder:	Molded into left fuel tank
Paint:	Powder-coat paint

DIMENSIONS

Length:	86.2"
Width:	87"
Width (with discharge in transport position):	75"
Height with ROPS:	76"
Weight:	1580 lbs.

WARRANTY

Commercial:	5 Year or 1500 Hour Limited Commercial Warranty (No hour limit first two years)
Frame and Deck shell:	Limited Lifetime Frame and Deck shell Warranty

OPTIONAL ACCESSORIES:

3 Bucket Powered Bagger	892055
Dump from seat bagger (14.5 bu.)	892054
Mulching Kit	792204
Trailer Hitch Kit	792158
LED Headlight Kit	792209
Tweel Kit	792205
Laser Edge Blades	792195
Equipment Cover	715153

Pro-Turn 572 EFI

Model Number: 992518

ENGINE

Brand:	Kawasaki®
Model:	FX850V EFI
Horsepower:	29.5
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	852 cc
Cylinder:	Cast-iron cylinder bores
Air Cleaner:	Dual stage canister air filter
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	12.5 GAL
Drive Wheels / Tires:	26 x 12 - 16 Radial Turf
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 3.0" tubular frame
Foot Plate:	Steel with extrusions to prevent slipping, with 2 mounted rubber isolators to reduce vibration

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Parker HTG
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting, self-tightening
Brakes:	Lever actuated wet disc brake, internal to transmission, assures maximum brake-holding capacity
Axles:	Tough 1.375-inch shaft for maximum strength
Instrument Panel:	Mounted on the right-hand side of the operator, key switch, throttle, BBC switch, fuel gauge, hour meter with maintenance reminders
Forward Speed Range:	0 - 15 mph
Reverse Speed Range:	0 - 6 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	7-gauge steel with .25-inch spindle reinforcement
Cutting Width:	X-Factor 3 Fabricated Deck
Cutting Height Adjustment:	72"
Cutting Height:	Foot-operated pedal adjustment from operator's seat, dial height of cut makes it easy to change cutting height by simply rotating the dial to the desired height of cut
Blade Engagement:	1-5.5" in ¼" increments, 19 positions
Discharge Chute:	Ogura® GT3.5 Electric Clutch
Front Caster Wheels:	Flip-up, flexible rubber chute for strength and durability, minimizes damage to landscape and trees, and eases transport of the machine
Spindles:	15 x 6 - 6 Semi-pneumatic
Spindle Pulleys:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Constant Belt Tension System:	Split steel design for strength and durability
Cutter Deck Belts:	The CBT system, exclusive to Gravely, ensures constant belt tension and consistent blade tip speed
Blades:	V-Belt
Blade Tip Speed:	3-24.5"
	18,229 fpm

ADDITIONAL SPECIFICATIONS

ROPS:	Foldable ROPS is standard, retractable seatbelt included
Seat:	Isolated plush seat with arm rests
Cup Holder:	Molded into left fuel tank
Paint:	Powder-coat paint

DIMENSIONS

Length:	86.2"
Width:	87"
Width (with discharge in transport position):	75"
Height with ROPS:	76"
Weight:	1580 lbs.

WARRANTY

Commercial:	5 Year or 1500 Hour Limited Commercial Warranty (No hour limit first two years)
Frame and Deck shell:	Limited Lifetime Frame and Deck shell Warranty

OPTIONAL ACCESSORIES:

3 Bucket Powered Bagger	892055
Dump from seat bagger (14.5 bu.)	892054
Mulching Kit	792204
Trailer Hitch Kit	792158
LED Headlight Kit	792209
Tweel Kit	792205
Laser Edge Blades	792195
Equipment Cover	715153

Pro-Tum 560 EFI

Model Number: 992516

ENGINE

Brand:	Kawasaki®
Model:	FX850V EFI
Horsepower:	29.5
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	852 cc
Cylinder:	Cast-iron cylinder bores
Air Cleaner:	Dual stage canister air filter
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	12.5 GAL
Drive Wheels / Tires:	26 x 12 - 16 Radial Turf
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 3.0" tubular frame
Foot Plate:	Steel with extrusions to prevent slipping, with 2 mounted rubber isolators to reduce vibration

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Parker HTG
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting, self-tightening
Brakes:	Lever actuated wet disc brake, internal to transmission, assures maximum brake-holding capacity
Axles:	Tough 1.375-inch shaft for maximum strength
Instrument Panel:	Mounted on the right-hand side of the operator, key switch, throttle, BBC switch, fuel gauge, hour meter with maintenance reminders
Forward Speed Range:	0 - 15 mph
Reverse Speed Range:	0 - 6 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	7-gauge steel with .25-inch spindle reinforcement
Cutting Width:	X-Factor 3 Fabricated Deck
Cutting Height Adjustment:	60"
Cutting Height:	Foot-operated pedal adjustment from operator's seat, dial height of cut makes it easy to change cutting height by simply rotating the dial to the desired height of cut
Blade Engagement:	1-5.5" in ¼" increments, 19 positions
Discharge Chute:	Ogura® GT3.5 Electric Clutch
Front Caster Wheels:	Flip-up, flexible rubber chute for strength and durability, minimizes damage to landscape and trees, and eases transport of the machine
Spindles:	15 x 6 - 6 Semi-pneumatic
Spindle Pulleys:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Constant Belt Tension System:	Split steel design for strength and durability
Cutter Deck Belts:	The CBT system, exclusive to Gravely, ensures constant belt tension and consistent blade tip speed
Blades:	V-Belt
Blade Tip Speed:	3-20.5"
	18,229 fpm

ADDITIONAL SPECIFICATIONS

ROPS:	Foldable ROPS is standard, retractable seatbelt included
Seat:	Isolated plush seat with arm rests
Cup Holder:	Molded into left fuel tank
Paint:	Powder-coat paint

DIMENSIONS

Length:	86.2"
Width:	63"
Width (with discharge in transport position):	75"
Height with ROPS:	76"
Weight:	1477 lbs.

WARRANTY

Commercial:	5 Year or 1500 Hour Limited Commercial Warranty (No hour limit first two years)
Frame and Deck shell:	Limited Lifetime Frame and Deck shell Warranty

OPTIONAL ACCESSORIES:

3 Bucket Powered Bagger	892055
Dump from seat bagger (14.5 bu.)	892054
Mulching Kit	792203
Trailer Hitch Kit	792158
LED Headlight Kit	792209
Tweel Kit	792205
Laser Edge Blades	792194
Equipment Cover	715153

Pro-Turn 560

Model Number: 992511

ENGINE

Brand:	Kawasaki®
Model:	FX921
Horsepower:	31
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	999 cc
Cylinder:	Cast-iron cylinder bores
Air Cleaner:	Dual stage canister air filter
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	12.5 GAL
Drive Wheels / Tires:	26 x 12 - 16 Radial Turf
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 3.0" tubular frame
Foot Plate:	Steel with extrusions to prevent slipping, with 2 mounted rubber isolators to reduce vibration

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Parker HTG
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting, self-tightening
Brakes:	Lever actuated wet disc brake, internal to transmission, assures maximum brake-holding capacity
Axles:	Tough 1.375-inch shaft for maximum strength
Instrument Panel:	Mounted on the right-hand side of the operator, key switch, throttle, BBC switch, fuel gauge, hour meter with maintenance reminders
Forward Speed Range:	0 - 15 mph
Reverse Speed Range:	0 - 6 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	7-gauge steel with .25-inch spindle reinforcement
Cutting Width:	X-Factor 3 Fabricated Deck
Cutting Height Adjustment:	60"
Cutting Height:	Foot-operated pedal adjustment from operator's seat, dial height of cut makes it easy to change cutting height by simply rotating the dial to the desired height of cut
Blade Engagement:	1-5.5" in ¼" increments, 19 positions
Discharge Chute:	Ogura® GT3.5 Electric Clutch
Front Caster Wheels:	Flip-up, flexible rubber chute for strength and durability, minimizes damage to landscape and trees, and eases transport of the machine
Spindles:	15 x 6 - 6 Semi-pneumatic
Spindle Pulleys:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Constant Belt Tension System:	Split steel design for strength and durability
Cutter Deck Belts:	The CBT system, exclusive to Gravely, ensures constant belt tension and consistent blade tip speed
Blades:	V-Belt
Blade Tip Speed:	3-20.5"
	18,229 fpm

ADDITIONAL SPECIFICATIONS

ROPS:	Foldable ROPS is standard, retractable seatbelt included
Seat:	Air Ride suspension with a plush seat and arm rests
Cup Holder:	Molded into left fuel tank
Paint:	Powder-coat paint

DIMENSIONS

Length:	86.2"
Width:	63"
Width (with discharge in transport position):	75"
Height with ROPS:	76"
Weight:	1487 lbs.

WARRANTY

Commercial:	5 Year or 1500 Hour Limited Commercial Warranty (No hour limit first two years)
Frame and Deck shell:	Limited Lifetime Frame and Deck shell Warranty

OPTIONAL ACCESSORIES:

3 Bucket Powered Bagger	892055
Dump from seat bagger (14.5 bu.)	892054
Mulching Kit	792203
Trailer Hitch Kit	792158
LED Headlight Kit	792209
Tweel Kit	792205
Laser Edge Blades	792194
Equipment Cover	715153

Pro-Turn 560

Model Number: 992514

ENGINE

Brand:	Kohler®
Model:	ZT740
Horsepower:	25
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	747 cc
Cylinder:	Cast-iron cylinder bores
Air Cleaner:	Heavy-duty air cleaner and stamped steel guard stand up to tough mowing conditions
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	12.5 GAL
Drive Wheels / Tires:	26 x 12 -16 Radial Turf
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 3.0" tubular frame
Foot Plate:	Steel with extrusions to prevent slipping, with 2 mounted rubber isolators to reduce vibration

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Parker HTG
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting, self-tightening
Brakes:	Lever actuated wet disc brake, internal to transmission, assures maximum brake-holding capacity
Axles:	Tough 1.375-inch shaft for maximum strength
Instrument Panel:	Mounted on the right-hand side of the operator, key switch, throttle, BBC switch, fuel gauge, hour meter with maintenance reminders
Forward Speed Range:	0 - 15 mph
Reverse Speed Range:	0 - 6 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	7-gauge steel with .25-inch spindle reinforcement
Cutting Width:	X-Factor 3 Fabricated Deck
Cutting Height Adjustment:	60"
Cutting Height:	Foot-operated pedal adjustment from operator's seat, dial height of cut makes it easy to change cutting height by simply rotating the dial to the desired height of cut
Blade Engagement:	1-5.5" in ¼" increments, 19 positions
Discharge Chute:	Ogura® GT3.5 Electric Clutch
Front Caster Wheels:	Flip-up, flexible rubber chute for strength and durability, minimizes damage to landscape and trees, and eases transport of the machine
Spindles:	15 x 6 - 6 Semi-pneumatic
Spindle Pulleys:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Constant Belt Tension System:	Split steel design for strength and durability
Cutter Deck Belts:	The CBT system, exclusive to Gravely, ensures constant belt tension and consistent blade tip speed
Blades:	V-Belt
Blade Tip Speed:	3-20.5"
	18,229 fpm

ADDITIONAL SPECIFICATIONS

ROPS:	Foldable ROPS is standard, retractable seatbelt included
Seat:	Plush seat with arm rests
Cup Holder:	Molded into left fuel tank
Paint:	Powder-coat paint

DIMENSIONS

Length:	84"
Width:	63"
Width (with discharge in transport position):	75"
Height with ROPS:	76"
Weight:	1463 lbs.

WARRANTY

Commercial:	5 Year or 1500 Hour Limited Commercial Warranty (No hour limit first two years)
Frame and Deck shell:	Limited Lifetime Frame and Deck shell Warranty

OPTIONAL ACCESSORIES:

3 Bucket Powered Bagger	892055
Dump from seat bagger (14.5 bu.)	892054
Mulching Kit	792203
Trailer Hitch Kit	792158
LED Headlight Kit	792229
Tweel Kit	792205
Laser Edge Blades	792194
Equipment Cover	715153

Pro-Turn 552

Model Number: 992510

ENGINE

Brand:	Kawasaki®
Model:	FX850V
Horsepower:	27
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	852 cc
Cylinder:	Cast-iron cylinder bores
Air Cleaner:	Multi-Stage canister air filter
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	12.5 GAL
Drive Wheels / Tires:	26 x 12 - 16 Radial Turf
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 3.0" tubular frame
Foot Plate:	Steel with extrusions to prevent slipping, with 2 mounted rubber isolators to reduce vibration

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Parker HTG
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting, self-tightening
Brakes:	Lever actuated wet disc brake, internal to transmission, assures maximum brake-holding capacity
Axles:	Tough 1.375-inch shaft for maximum strength
Instrument Panel:	Mounted on the right-hand side of the operator, key switch, throttle, BBC switch, fuel gauge, hour meter with maintenance reminders
Forward Speed Range:	0 - 15 mph
Reverse Speed Range:	0 - 6 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	7-gauge steel with .25-inch spindle reinforcement
Cutting Width:	X-Factor 3 Fabricated Deck
Cutting Height Adjustment:	52"
Cutting Height:	Foot-operated pedal adjustment from operator's seat, dial height of cut makes it easy to change cutting height by simply rotating the dial to the desired height of cut
Blade Engagement:	1-5.5" in ¼" increments, 19 positions
Discharge Chute:	Ogura® GT3.5 Electric Clutch
Front Caster Wheels:	Flip-up, flexible rubber chute for strength and durability, minimizes damage to landscape and trees, and eases transport of the machine
Spindles:	15 x 6 - 6 Semi-pneumatic
Spindle Pulleys:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Constant Belt Tension System:	Split steel design for strength and durability
Cutter Deck Belts:	The CBT system, exclusive to Gravely, ensures constant belt tension and consistent blade tip speed
Blades:	V-Belt
Blade Tip Speed:	3-18"
	18,229 fpm

ADDITIONAL SPECIFICATIONS

ROPS:	Foldable ROPS is standard, retractable seatbelt included
Seat:	Air Ride suspension with a plush seat and arm rests
Cup Holder:	Molded into left fuel tank
Paint:	Powder-coat paint

DIMENSIONS

Length:	84"
Width:	63"
Width (with discharge in transport position):	51"
Height with ROPS:	76"
Weight:	1447 lbs.

WARRANTY

Commercial:	5 Year or 1500 Hour Limited Commercial Warranty (No hour limit first two years)
Frame and Deck shell:	Limited Lifetime Frame and Deck shell Warranty

OPTIONAL ACCESSORIES:

3 Bucket Powered Bagger	892055
Dump from seat bagger (14.5 bu.)	892054
Mulching Kit	792202
Trailer Hitch Kit	792158
LED Headlight Kit	792229
Tweel Kit	792205
Laser Edge Blades	792195
Equipment Cover	715153

Pro-Tum 552

Model Number: 992513

ENGINE

Brand:	Kohler®
Model:	ZT740
Horsepower:	25
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	747 cc
Cylinder:	Cast-iron cylinder bores
Air Cleaner:	Heavy-duty air cleaner and stamped steel guard stand up to tough mowing conditions
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	12.5 GAL
Drive Wheels / Tires:	26 x 12 -16 Radial Turf
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 3.0" tubular frame
Foot Plate:	Steel with extrusions to prevent slipping, with 2 mounted rubber isolators to reduce vibration

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Parker HTG
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting, self-tightening
Brakes:	Lever actuated wet disc brake, internal to transmission, assures maximum brake-holding capacity
Axles:	Tough 1.375-inch shaft for maximum strength
Instrument Panel:	Mounted on the right-hand side of the operator, key switch, throttle, BBC switch, fuel gauge, hour meter with maintenance reminders
Forward Speed Range:	0 - 15 mph
Reverse Speed Range:	0 - 6 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	7-gauge steel with .25-inch spindle reinforcement
Cutting Width:	X-Factor 3 Fabricated Deck
Cutting Height Adjustment:	52"
Cutting Height:	Foot-operated pedal adjustment from operator's seat, dial height of cut makes it easy to change cutting height by simply rotating the dial to the desired height of cut
Blade Engagement:	1-5.5" in ¼" increments, 19 positions
Discharge Chute:	Ogura® GT3.5 Electric Clutch
Front Caster Wheels:	Flip-up, flexible rubber chute for strength and durability, minimizes damage to landscape and trees, and eases transport of the machine
Spindles:	15 x 6 - 6 Semi-pneumatic
Spindle Pulleys:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Constant Belt Tension System:	Split steel design for strength and durability
Cutter Deck Belts:	The CBT system, exclusive to Gravely, ensures constant belt tension and consistent blade tip speed
Blades:	V-Belt
Blade Tip Speed:	3-18"
	18,229 fpm

ADDITIONAL SPECIFICATIONS

ROPS:	Foldable ROPS is standard, retractable seatbelt included
Seat:	Isolated plush seat and arm rests
Cup Holder:	Molded into left fuel tank
Paint:	Powder-coat paint

DIMENSIONS

Length:	84"
Width:	63"
Width (with discharge in transport position):	51"
Height with ROPS:	76"
Weight:	1423 lbs.

WARRANTY

Commercial:	5 Year or 1500 Hour Limited Commercial Warranty (No hour limit first two years)
Frame and Deck shell:	Limited Lifetime Frame and Deck shell Warranty

OPTIONAL ACCESSORIES:

3 Bucket Powered Bagger	892055
Dump from seat bagger (14.5 bu.)	892054
Mulching Kit	792202
Trailer Hitch Kit	792158
LED Headlight Kit	792209
Tweel Kit	792205
Laser Edge Blades	792193
Equipment Cover	715153

Pro-Turn 372

Model Number: 992525

ENGINE

Brand:	Kawasaki®
Model:	FX921
Horsepower:	31
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	999 cc
Cylinder:	Cast-iron cylinder bores
Air Cleaner:	Dual stage canister air filter
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	12.5 GAL
Drive Wheels / Tires:	24 x 12 - 16 Bias Ply Turf
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 3.0" tubular frame
Foot Plate:	Steel with extrusions to prevent slipping, with 2 mounted rubber isolators to reduce vibration

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Parker HTJ
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting, self-tightening
Brakes:	Lever actuated wet disc brake, internal to transmission, assures maximum brake-holding capacity
Axles:	Tough 1.375-inch shaft for maximum strength
Instrument Panel:	Mounted on the right-hand side of the operator, key switch, throttle, BBC switch, fuel gauge, hour meter with maintenance reminders
Forward Speed Range:	0 - 11 mph
Reverse Speed Range:	0 - 5 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	7-gauge steel with .25-inch spindle reinforcement
Cutting Width:	X-Factor 3 Fabricated Deck
Cutting Height Adjustment:	72"
Cutting Height:	Foot-operated pedal adjustment from operator's seat, dial height of cut makes it easy to change cutting height by simply rotating the dial to the desired height of cut
Blade Engagement:	1-5.5" in ¼" increments, 19 positions
Discharge Chute:	Ogura® GT3.5 Electric Clutch
Front Caster Wheels:	Flip-up, flexible rubber chute for strength and durability, minimizes damage to landscape and trees, and eases transport of the machine
Spindles:	15 x 6 - 6 Pneumatic
Spindle Pulleys:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Constant Belt Tension System:	Split steel design for strength and durability
Cutter Deck Belts:	The CBT system, exclusive to Gravely, ensures constant belt tension and consistent blade tip speed
Blades:	V-Belt
Blade Tip Speed:	3-24.5"
	18,229 fpm

ADDITIONAL SPECIFICATIONS

ROPS:	Foldable ROPS is standard, retractable seatbelt included
Seat:	Suspension plush seat and arm rests
Cup Holder:	Molded into left fuel tank
Paint:	Powder-coat paint

DIMENSIONS

Length:	86.2"
Width:	75"
Width (with discharge in transport position):	87"
Height with ROPS:	76"
Weight:	1472 lbs.

WARRANTY

Commercial:	5 Year or 1250 Hour Limited Commercial Warranty (No hour limit first two years)
Frame and Deck shell:	Limited Lifetime Frame and Deck shell Warranty

OPTIONAL ACCESSORIES:

Mulching Kit	792204
Trailer Hitch Kit	792158
LED Headlight Kit	792229
Tweel Kit	792196
Air Ride Seat	792228
Laser Edge Blades	792194
Equipment Cover	715153

Pro-Turn 360

Model Number: 992526

ENGINE

Brand:	Kawasaki®
Model:	FX921
Horsepower:	31
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	999 cc
Cylinder:	Cast-iron cylinder bores
Air Cleaner:	Dual stage canister air filter
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	12.5 GAL
Drive Wheels / Tires:	24 x 12 - 16 Bias Ply Turf
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 3.0" tubular frame
Foot Plate:	Steel with extrusions to prevent slipping, with 2 mounted rubber isolators to reduce vibration

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Parker HTJ
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting, self-tightening
Brakes:	Lever actuated wet disc brake, internal to transmission, assures maximum brake-holding capacity
Axles:	Tough 1.375-inch shaft for maximum strength
Instrument Panel:	Mounted on the right-hand side of the operator, key switch, throttle, BBC switch, fuel gauge, hour meter with maintenance reminders
Forward Speed Range:	0 - 11 mph
Reverse Speed Range:	0 - 5 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	7-gauge steel with .25-inch spindle reinforcement
Cutting Width:	X-Factor 3 Fabricated Deck
Cutting Height Adjustment:	60"
Cutting Height:	Foot-operated pedal adjustment from operator's seat, dial height of cut makes it easy to change cutting height by simply rotating the dial to the desired height of cut
Blade Engagement:	1-5.5" in ¼" increments, 19 positions
Discharge Chute:	Ogura® GT2.75 Electric Clutch
Front Caster Wheels:	Flip-up, flexible rubber chute for strength and durability, minimizes damage to landscape and trees, and eases transport of the machine
Spindles:	15 x 6 - 6 Pneumatic
Spindle Pulleys:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Constant Belt Tension System:	Split steel design for strength and durability
Cutter Deck Belts:	The CBT system, exclusive to Gravelly, ensures constant belt tension and consistent blade tip speed
Blades:	V-Belt
Blade Tip Speed:	3-20.5"
	18,229 fpm

ADDITIONAL SPECIFICATIONS

ROPS:	Foldable ROPS is standard, retractable seatbelt included
Seat:	Suspension plush seat and arm rests
Cup Holder:	Molded into left fuel tank
Paint:	Powder-coat paint

DIMENSIONS

Length:	84"
Width:	75"
Width (with discharge in transport position):	63"
Height with ROPS:	76"
Weight:	1350 lbs.

WARRANTY

Commercial:	5 Year or 1250 Hour Limited Commercial Warranty (No hour limit first two years)
Frame and Deck shell:	Limited Lifetime Frame and Deck shell Warranty

OPTIONAL ACCESSORIES:

Powered 3-Bin bagger	792232
Mulching Kit	792204
Trailer Hitch Kit	792158
LED Headlight Kit	792229
Tweel Kit	792196
Air Ride Seat	792228
Laser Edge Blades	792194
Equipment Cover	715153

Pro-Turn 360

Model Number: 992523

ENGINE

Brand:	Kawasaki®
Model:	FT730 EFI
Horsepower:	26
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	726 cc
Cylinder:	Cast-iron cylinder bores
Air Cleaner:	High-efficiency, centrifugal air intake system
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	12.5 GAL
Drive Wheels / Tires:	24 x 12 - 16 Bias Ply Turf
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 3.0" tubular frame
Foot Plate:	Steel with extrusions to prevent slipping, with 2 mounted rubber isolators to reduce vibration

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Parker HTJ
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting, self-tightening
Brakes:	Lever actuated wet disc brake, internal to transmission, assures maximum brake-holding capacity
Axles:	Tough 1.375-inch shaft for maximum strength
Instrument Panel:	Mounted on the right-hand side of the operator, key switch, throttle, BBC switch, fuel gauge, hour meter with maintenance reminders
Forward Speed Range:	0 - 11 mph
Reverse Speed Range:	0 - 5 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	7-gauge steel with .25-inch spindle reinforcement
Cutting Width:	X-Factor 3 Fabricated Deck
Cutting Height Adjustment:	60"
Cutting Height:	Foot-operated pedal adjustment from operator's seat, dial height of cut makes it easy to change cutting height by simply rotating the dial to the desired height of cut
Blade Engagement:	1-5.5" in ¼" increments, 19 positions
Discharge Chute:	Ogura® GT2.75 Electric Clutch
Front Caster Wheels:	Flip-up, flexible rubber chute for strength and durability, minimizes damage to landscape and trees, and eases transport of the machine
Spindles:	15 x 6 - 6 Pneumatic
Spindle Pulleys:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Constant Belt Tension System:	Split steel design for strength and durability
Cutter Deck Belts:	The CBT system, exclusive to Gravely, ensures constant belt tension and consistent blade tip speed
Blades:	V-Belt
Blade Tip Speed:	3-20.5"
	18,229 fpm

ADDITIONAL SPECIFICATIONS

ROPS:	Foldable ROPS is standard, retractable seatbelt included
Seat:	Suspension plush seat and arm rests
Cup Holder:	Molded into left fuel tank
Paint:	Powder-coat paint

DIMENSIONS

Length:	84"
Width:	75"
Width (with discharge in transport position):	63"
Height with ROPS:	76"
Weight:	1347 lbs.

WARRANTY

Commercial:	5 Year or 1250 Hour Limited Commercial Warranty (No hour limit first two years)
Frame and Deck shell:	Limited Lifetime Frame and Deck shell Warranty

OPTIONAL ACCESSORIES:

Powered 3-Bin bagger	792232
Mulching Kit	792203
Trailer Hitch Kit	792158
LED Headlight Kit	792229
Tweel Kit	792196
Air Ride Seat	792228
Laser Edge Blades	792194
Equipment Cover	715153

Pro-Turn 360

Model Number: 992524

ENGINE

Brand:	Kohler®
Model:	ZT740
Horsepower:	25
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	747 cc
Cylinder:	Cast-iron cylinder bores
Air Cleaner:	Heavy-duty air cleaner and stamped steel guard stand up to tough mowing conditions
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	12.5 GAL
Drive Wheels / Tires:	24 x 12 -16 Bias Ply Turf
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 3.0" tubular frame
Foot Plate:	Steel with extrusions to prevent slipping, with 2 mounted rubber isolators to reduce vibration

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Parker HTJ
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting, self-tightening
Brakes:	Lever actuated wet disc brake, internal to transmission, assures maximum brake-holding capacity
Axles:	Tough 1.375-inch shaft for maximum strength
Instrument Panel:	Mounted on the right-hand side of the operator, key switch, throttle, BBC switch, fuel gauge, hour meter with maintenance reminders
Forward Speed Range:	0 - 11 mph
Reverse Speed Range:	0 - 5 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	7-gauge steel with .25-inch spindle reinforcement
Cutting Width:	X-Factor 3 Fabricated Deck
Cutting Height Adjustment:	60"
Cutting Height:	Foot-operated pedal adjustment from operator's seat, dial height of cut makes it easy to change cutting height by simply rotating the dial to the desired height of cut
Blade Engagement:	1-5.5" in ¼" increments, 19 positions
Discharge Chute:	Ogura® GT2.75 Electric Clutch
Front Caster Wheels:	Flip-up, flexible rubber chute for strength and durability, minimizes damage to landscape and trees, and eases transport of the machine
Spindles:	15 x 6 - 6 Pneumatic
Spindle Pulleys:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Constant Belt Tension System:	Split steel design for strength and durability
Cutter Deck Belts:	The CBT system, exclusive to Gravely, ensures constant belt tension and consistent blade tip speed
Blades:	V-Belt
Blade Tip Speed:	3-20.5"
	18,229 fpm

ADDITIONAL SPECIFICATIONS

ROPS:	Foldable ROPS is standard, retractable seatbelt included
Seat:	Suspension plush seat and arm rests
Cup Holder:	Molded into left fuel tank
Paint:	Powder-coat paint

DIMENSIONS

Length:	84"
Width:	75"
Width (with discharge in transport position):	63"
Height with ROPS:	76"
Weight:	1333 lbs.

WARRANTY

Commercial:	5 Year or 1250 Hour Limited Commercial Warranty (No hour limit first two years)
Frame and Deck shell:	Limited Lifetime Frame and Deck shell Warranty

OPTIONAL ACCESSORIES:

Powered 3-Bin bagger	792232
Mulching Kit	792203
Trailer Hitch Kit	792158
LED Headlight Kit	792229
Tweel Kit	792196
Air Ride Seat	792228
Laser Edge Blades	792194

Pro-Turn 360

Model Number: 992522

ENGINE

Brand:	Kawasaki®
Model:	FX730
Horsepower:	23.5
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	747 cc
Cylinder:	Cast-iron cylinder bores
Air Cleaner:	Multi-Stage canister air filter
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	12.5 GAL
Drive Wheels / Tires:	24 x 12 - 16 Bias Ply Turf
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 3.0" tubular frame
Foot Plate:	Steel with extrusions to prevent slipping, with 2 mounted rubber isolators to reduce vibration

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Parker HTJ
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting, self-tightening
Brakes:	Lever actuated wet disc brake, internal to transmission, assures maximum brake-holding capacity
Axles:	Tough 1.375-inch shaft for maximum strength
Instrument Panel:	Mounted on the right-hand side of the operator, key switch, throttle, BBC switch, fuel gauge, hour meter with maintenance reminders
Forward Speed Range:	0 - 11 mph
Reverse Speed Range:	0 - 5 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	7-gauge steel with .25-inch spindle reinforcement
Cutting Width:	X-Factor 3 Fabricated Deck
Cutting Height Adjustment:	60"
Cutting Height:	Foot-operated pedal adjustment from operator's seat,
Blade Engagement:	Dial height of cut makes it easy to change cutting height by simply rotating the dial to the desired height of cut
Discharge Chute:	1-5.5" in ¼" increments, 19 positions
Front Caster Wheels:	Ogura® GT2.75 Electric Clutch
Spindles:	Flip-up, flexible rubber chute for strength and durability, minimizes damage to landscape and trees, and eases transport of the machine
Spindle Pulleys:	15 x 6 - 6 Pneumatic
Constant Belt Tension System:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Cutter Deck Belts:	Split steel design for strength and durability
Blades:	The CBT system, exclusive to Gravelly, ensures constant belt tension and consistent blade tip speed
Blade Tip Speed:	V-Belt
	3-20.5"
	18,229 fpm

ADDITIONAL SPECIFICATIONS

ROPS:	Foldable ROPS is standard, retractable seatbelt included
Seat:	Suspension plush seat and arm rests
Cup Holder:	Molded into left fuel tank
Paint:	Powder-coat paint

DIMENSIONS

Length:	84"
Width:	75"
Width (with discharge in transport position):	63"
Height with ROPS:	76"
Weight:	1347 lbs.

WARRANTY

Commercial:	5 Year or 1250 Hour Limited Commercial Warranty (No hour limit first two years)
Frame and Deck shell:	Limited Lifetime Frame and Deck shell Warranty

OPTIONAL ACCESSORIES:

Powered 3-Bin bagger	792232
Mulching Kit	792203
Trailer Hitch Kit	792158
LED Headlight Kit	792229
Tweel Kit	792196
Air Ride Seat	792228
Laser Edge Blades	792194

Pro-Turn 352

Model Number: 992521

ENGINE

Brand:	Kawasaki®
Model:	FX691
Horsepower:	22
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	726 cc
Cylinder:	Cast-iron cylinder bores
Air Cleaner:	Dual stage canister air filter
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	12.5 GAL
Drive Wheels / Tires:	24 x 12 - 16 Bias Ply Turf
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 3.0" tubular frame
Foot Plate:	Steel with extrusions to prevent slipping, with 2 mounted rubber isolators to reduce vibration

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Parker HTJ
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting, self-tightening
Brakes:	Lever actuated wet disc brake, internal to transmission, assures maximum brake-holding capacity
Axles:	Tough 1.375-inch shaft for maximum strength
Instrument Panel:	Mounted on the right-hand side of the operator, key switch, throttle, BBC switch, fuel gauge, hour meter with maintenance reminders
Forward Speed Range:	0 - 11 mph
Reverse Speed Range:	0 - 5 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	7-gauge steel with .25-inch spindle reinforcement
Cutting Width:	X-Factor 3 Fabricated Deck
Cutting Height Adjustment:	52"
Cutting Height:	Foot-operated pedal adjustment from operator's seat, dial height of cut makes it easy to change cutting height by simply rotating the dial to the desired height of cut
Blade Engagement:	1-5.5" in ¼" increments, 19 positions
Discharge Chute:	Ogura® GT2.75 Electric Clutch
Front Caster Wheels:	Flip-up, flexible rubber chute for strength and durability, minimizes damage to landscape and trees, and eases transport of the machine
Spindles:	15 x 6 - 6 Pneumatic
Spindle Pulleys:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Constant Belt Tension System:	Split steel design for strength and durability
Cutter Deck Belts:	The CBT system, exclusive to Gravely, ensures constant belt tension and consistent blade tip speed
Blades:	V-Belt
Blade Tip Speed:	3-18"
	18,229 fpm

ADDITIONAL SPECIFICATIONS

ROPS:	Foldable ROPS is standard, retractable seatbelt included
Seat:	Suspension plush seat and arm rests
Cup Holder:	Molded into left fuel tank
Paint:	Powder-coat paint

DIMENSIONS

Length:	84"
Width:	67"
Width (with discharge in transport position):	55"
Height with ROPS:	76"
Weight:	1320 lbs.

WARRANTY

Commercial:	5 Year or 1250 Hour Limited Commercial Warranty (No hour limit first two years)
Frame and Deck shell:	Limited Lifetime Frame and Deck shell Warranty

OPTIONAL ACCESSORIES:

Powered 3-Bin bagger	792231
Mulching Kit	792202
Trailer Hitch Kit	792158
LED Headlight Kit	792229
Tweel Kit	792196
Air Ride Seat	792228
Laser Edge Blades	792193

Pro-Turn 348

Model Number: 992520

ENGINE

Brand:	Kawasaki®
Model:	FX691
Horsepower:	22
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	726 cc
Cylinder:	Cast-iron cylinder bores
Air Cleaner:	Dual stage canister air filter
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	12.5 GAL
Drive Wheels / Tires:	24 x 12 - 16 Bias Ply Turf
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 3.0" tubular frame
Foot Plate:	Steel with extrusions to prevent slipping, with 2 mounted rubber isolators to reduce vibration

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Parker HTJ
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting, self-tightening
Brakes:	Lever actuated wet disc brake, internal to transmission, assures maximum brake-holding capacity
Axles:	Tough 1.375-inch shaft for maximum strength
Instrument Panel:	Mounted on the right-hand side of the operator, key switch, throttle, BBC switch, fuel gauge, hour meter with maintenance reminders
Forward Speed Range:	0 - 11 mph
Reverse Speed Range:	0 - 5 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	7-gauge steel with .25-inch spindle reinforcement
Cutting Width:	X-Factor 3 Fabricated Deck
Cutting Height Adjustment:	52"
Cutting Height:	Foot-operated pedal adjustment from operator's seat, dial height of cut makes it easy to change cutting height by simply rotating the dial to the desired height of cut
Blade Engagement:	1-5.5" in ¼" increments, 19 positions
Discharge Chute:	Ogura® GT2.75 Electric Clutch
Front Caster Wheels:	Flip-up, flexible rubber chute for strength and durability, minimizes damage to landscape and trees, and eases transport of the machine
Spindles:	15 x 6 - 6 Pneumatic
Spindle Pulleys:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Constant Belt Tension System:	Split steel design for strength and durability
Cutter Deck Belts:	The CBT system, exclusive to Gravelly, ensures constant belt tension and consistent blade tip speed
Blades:	V-Belt
Blade Tip Speed:	3-16.19"
	18,229 fpm

ADDITIONAL SPECIFICATIONS

ROPS:	Foldable ROPS is standard, retractable seatbelt included
Seat:	Suspension plush seat and arm rests
Cup Holder:	Molded into left fuel tank
Paint:	Powder-coat paint

DIMENSIONS

Length:	84"
Width:	63"
Width (with discharge in transport position):	51"
Height with ROPS:	76"
Weight:	1235 lbs.

WARRANTY

Commercial:	5 Year or 1250 Hour Limited Commercial Warranty (No hour limit first two years)
Frame and Deck shell:	Limited Lifetime Frame and Deck shell Warranty

OPTIONAL ACCESSORIES:

Powered 3-Bin bagger	792226
Mulching Kit	791096
Trailer Hitch Kit	792158
LED Headlight Kit	792229
Tweel Kit	792196
Air Ride Seat	792228
Laser Edge Blades	792192

Pro-Turn 148

Model Number: 991128

ENGINE

Brand:	Kawasaki®
Model:	FX691V
Horsepower:	22
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	726 cc
Cylinder:	Cast-iron cylinder bores
Air Cleaner:	Dual stage canister air filter
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	10 GAL/37.8 L
Drive Wheels / Tires:	Turf 23 x 10.5 – 12
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 2.5" tubular frame
Foot Plate:	Steel with extrusions to prevent slipping, flip up for ease of belt maintenance

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Hydro-Gear® ZT-3400
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting, self-tightening
Brakes:	Lever actuated, debris free internal brake
Axles:	Robust 1.125-inch shaft for greater strength
Instrument Panel:	Mounted on the right-hand side of the operator, key switch, throttle, manual choke, BBC switch, hour meter with maintenance reminders
Forward Speed Range:	0 – 10 mph
Reverse Speed Range:	0 – 5 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	7-gauge steel with .25-inch spindle reinforcement
Cutting Width:	48"
Cutting Height Adjustment:	Foot-operated pedal adjustment from operator's seat, dial height of cut makes it easy to change cutting height by simply rotating the dial to the desired height of cut
Cutting Height:	1.5-5.5" in ¼" increments, 17 positions
Blade Engagement:	Ogura® GT2.5 Electric Clutch
Discharge Chute:	Flip-up, flexible rubber chute for strength and durability, minimizes damage to landscape and trees, and eases transport of the machine
Front Caster Wheels:	Smooth 13 x 6.5 – 6 pneumatic
Spindles:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Spindle Pulleys:	Split steel design for strength and durability
Constant Belt Tension System:	The CBT system, exclusive to Gravely, ensures constant belt tension and consistent blade tip speed
Cutter Deck Belts:	Hex belt, has the ability to run on both sides
Blades:	3–16.5"
Blade Tip Speed:	18,000 fpm

ADDITIONAL SPECIFICATIONS

ROPS:	Foldable ROPS is standard, retractable seatbelt included
Seat:	High Back w/ Full Suspension
Cup Holder:	Molded into left fuel tank
Paint:	Powder-coat paint

DIMENSIONS

Length:	78.5"
Width:	62"
Width (with discharge in transport position):	50"
Height with ROPS:	68"
Weight:	1062 lbs.

WARRANTY

Commercial:	5 Year or 1250 Hour Limited Commercial Warranty (No hour limit first two years)
Frame and Deck shell:	Limited Lifetime Frame and Deck shell Warranty

OPTIONAL ACCESSORIES:

2-Bucket Powered Bagger	891007
Mulching Kit	791057
Striping Kit	792067
Trailer Hitch Kit	792158
Headlight Kit	792162
Hard-Top Sunshade Kit	792180
Rear Wheel Covers	791021
Front Wheel Covers	792106
Operator Controlled Discharge Baffle	792154
Radial Tire Drive Conversion Kit	792153
2-Bucket Bagger Completion Kit	791060
Gravelly Equipment Cover	715153
Laser Edge Blade Kit	792192
Laser Edge Mulch Blade Kit	792198

Pro-Turn 152

Model Number: 991129

ENGINE

Brand:	Kawasaki®
Model:	FX691V
Horsepower:	22
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	726 cc
Cylinder:	Cast-iron cylinder bores
Air Cleaner:	Dual stage canister air filter
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	10 GAL/37.8 L
Drive Wheels / Tires:	Turf 23 x 10.5 – 12
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 2.5" tubular frame
Foot Plate:	Steel with extrusions to prevent slipping, flip up for ease of belt maintenance

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Hydro-Gear® ZT-3400
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting, self-tightening
Brakes:	Lever actuated, debris free internal brake
Axles:	Robust 1.125-inch shaft for greater strength
Instrument Panel:	Mounted on the right-hand side of the operator, key switch, throttle, manual choke, BBC switch, hour meter with maintenance reminders
Forward Speed Range:	0 – 10 mph
Reverse Speed Range:	0 – 5 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	7-gauge steel with .25-inch spindle reinforcement
Cutting Width:	52"
Cutting Height Adjustment:	Foot-operated pedal adjustment from operator's seat, dial height of cut makes it easy to change cutting height by simply rotating the dial to the desired height of cut
Cutting Height:	1.5-5.5" in ¼" increments, 17 positions
Blade Engagement:	Ogura® GT2.5 Electric Clutch
Discharge Chute:	Flip-up, flexible rubber chute for strength and durability, minimizes damage to landscape and trees, and eases transport of the machine
Front Caster Wheels:	Smooth 13 x 6.5 – 6 pneumatic
Spindles:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Spindle Pulleys:	Split steel design for strength and durability
Constant Belt Tension System:	The CBT system, exclusive to Gravely, ensures constant belt tension and consistent blade tip speed
Cutter Deck Belts:	Hex belt, has the ability to run on both sides
Blades:	3–18"
Blade Tip Speed:	18,000 fpm

ADDITIONAL SPECIFICATIONS

ROPS:	Foldable ROPS is standard, retractable seatbelt included
Seat:	High Back w/ Full Suspension
Cup Holder:	Molded into left fuel tank
Paint:	Powder-coat paint

DIMENSIONS

Length:	78.5"
Width:	67.5"
Width (with discharge in transport position):	55.5"
Height with ROPS:	71"
Weight:	1079 lbs.

WARRANTY

Commercial:	5 Year or 1000 Hour Limited Commercial Warranty (No hour limit first two years)
Frame and Deck shell:	Limited Lifetime Frame and Deck shell Warranty

OPTIONAL ACCESSORIES:

2-Bucket Powered Bagger	891007
Mulching Kit	791058
Striping Kit	792067
Trailer Hitch Kit	792158
Headlight Kit	792162
Hard Top Sunshade Kit	792180
Rear Wheel Covers	791021
Front Wheel Covers	792106
Operator Controlled Discharge Baffle	792154
Radial Tire Drive Conversion Kit	792153
2-Bucket Bagger Completion Kit	791061
Gravelly Equipment Cover	715153
Laser Edge Blade Kit	792193
Laser Edge Mulch Blade Kit	792199

Pro-Turn 152

Model Number: 991132

ENGINE

Brand:	Kohler®
Model:	ZT 730
Horsepower:	23
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	747 cc
Cylinder:	Cast-iron cylinder bores
Air Cleaner:	Heavy-duty air cleaner
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	10 GAL/37.8 L
Drive Wheels / Tires:	Turf 23 x 10.5 – 12
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 2.5" tubular frame
Foot Plate:	Steel with extrusions to prevent slipping, flip up for ease of belt maintenance

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Hydro-Gear® ZT-3400
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting, self-tightening
Brakes:	Lever actuated, debris free internal brake
Axles:	Robust 1.125-inch shaft for greater strength
Instrument Panel:	Mounted on the right-hand side of the operator, key switch, throttle, manual choke, BBC switch, hour meter with maintenance reminders
Forward Speed Range:	0 – 10 mph
Reverse Speed Range:	0 – 5 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	7-gauge steel with .25-inch spindle reinforcement
Cutting Width:	52"
Cutting Height Adjustment:	Foot-operated pedal adjustment from operator's seat, dial height of cut makes it easy to change cutting height by simply rotating the dial to the desired height of cut
Cutting Height:	1.5-5.5" in ¼" increments, 17 positions
Blade Engagement:	Ogura® GT2.5 Electric Clutch
Discharge Chute:	Flip-up, flexible rubber chute for strength and durability, minimizes damage to landscape and trees, and eases transport of the machine
Front Caster Wheels:	Smooth 13 x 6.5 – 6 pneumatic
Spindles:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Spindle Pulleys:	Split steel design for strength and durability
Constant Belt Tension System:	The CBT system, exclusive to Gravely, ensures constant belt tension and consistent blade tip speed
Cutter Deck Belts:	Hex belt, has the ability to run on both sides
Blades:	3–18"
Blade Tip Speed:	18,000 fpm

ADDITIONAL SPECIFICATIONS

ROPS:	Foldable ROPS is standard, retractable seatbelt included
Seat:	High Back w/ Full Suspension
Cup Holder:	Molded into left fuel tank
Paint:	Powder-coat paint

DIMENSIONS

Length:	78.5"
Width:	67.5"
Width (with discharge in transport position):	55.5"
Height with ROPS:	71"
Weight:	1068 lbs.

WARRANTY

Commercial:	5 Year or 1000 Hour Limited Commercial Warranty (No hour limit first two years)
Frame and Deck shell:	Limited Lifetime Frame and Deck shell Warranty

OPTIONAL ACCESSORIES:

2-Bucket Powered Bagger	891007
Mulching Kit	791058
Striping Kit	792067
Trailer Hitch Kit	792158
Headlight Kit	792162
Hard Top Sunshade Kit	792180
Rear Wheel Covers	791021
Front Wheel Covers	792106
Operator Controlled Discharge Baffle	792154
Radial Tire Drive Conversion Kit	792153
2-Bucket Bagger Completion Kit	791061
Gravelly Equipment Cover	715153
Laser Edge Blade Kit	792193
Laser Edge Mulch Blade Kit	792199

Pro-Turn 160

Model Number: 991130

ENGINE

Brand:	Kawasaki®
Model:	FX730V
Horsepower:	23.5
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	726 cc
Cylinder:	Cast-iron cylinder bores
Air Cleaner:	Dual stage canister air filter
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	10 GAL/37.8 L
Drive Wheels / Tires:	Turf 23 x 10.5 – 12
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 2.5" tubular frame
Foot Plate:	Steel with extrusions to prevent slipping, flip up for ease of belt maintenance

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Hydro-Gear® ZT-3400
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting, self-tightening
Brakes:	Lever actuated, debris free internal brake
Axles:	Robust 1.125-inch shaft for greater strength
Instrument Panel:	Mounted on the right-hand side of the operator, key switch, throttle, manual choke, BBC switch, hour meter with maintenance reminders
Forward Speed Range:	0 – 10 mph
Reverse Speed Range:	0 – 5 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	7-gauge steel with .25-inch spindle reinforcement
Cutting Width:	60"
Cutting Height Adjustment:	Foot-operated pedal adjustment from operator's seat, dial height of cut makes it easy to change cutting height by simply rotating the dial to the desired height of cut
Cutting Height:	1.5-5.5" in ¼" increments, 17 positions
Blade Engagement:	Ogura® GT2.5 Electric Clutch
Discharge Chute:	Flip-up, flexible rubber chute for strength and durability, minimizes damage to landscape and trees, and eases transport of the machine
Front Caster Wheels:	Smooth 13 x 6.5 – 6 pneumatic
Spindles:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Spindle Pulleys:	Split steel design for strength and durability
Constant Belt Tension System:	The CBT system, exclusive to Gravely, ensures constant belt tension and consistent blade tip speed
Cutter Deck Belts:	Hex belt, has the ability to run on both sides
Blades:	3–20.5"
Blade Tip Speed:	18,000 fpm

ADDITIONAL SPECIFICATIONS

ROPS:	Foldable ROPS is standard, retractable seatbelt included
Seat:	High Back w/ Full Suspension
Cup Holder:	Molded into left fuel tank
Paint:	Powder-coat paint

DIMENSIONS

Length:	78.5"
Width:	75"
Width (with discharge in transport position):	63"
Height with ROPS:	71"
Weight:	1121 lbs.

WARRANTY

Commercial:	5 Year or 1000 Hour Limited Commercial Warranty (No hour limit first two years)
Frame and Deck shell:	Limited Lifetime Frame and Deck shell Warranty

OPTIONAL ACCESSORIES:

2-Bucket Powered Bagger	891007
Mulching Kit	791059
Striping Kit	792067
Trailer Hitch Kit	792158
Headlight Kit	792162
Hard Top Sunshade Kit	792180
Rear Wheel Covers	791021
Front Wheel Covers	792106
Operator Controlled Discharge Baffle	792154
Radial Tire Drive Conversion Kit	792153
2-Bucket Bagger Completion Kit	791062
Gravelly Equipment Cover	715153
Laser Edge Blade Kit	792194
Laser Edge Mulch Blade Kit	792200

Pro-Turn 160

Model Number: 991133

ENGINE

Brand:	Kohler®
Model:	ZT740
Horsepower:	25
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	747 cc
Cylinder:	Cast-iron cylinder bores
Air Cleaner:	Heavy-duty air cleaner
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	10 GAL/37.8 L
Drive Wheels / Tires:	Turf 23 x 10.5 – 12
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 2.5" tubular frame
Foot Plate:	Steel with extrusions to prevent slipping, flip up for ease of belt maintenance

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Hydro-Gear® ZT-3400
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting, self-tightening
Brakes:	Lever actuated, debris free internal brake
Axles:	Robust 1.125-inch shaft for greater strength
Instrument Panel:	Mounted on the right-hand side of the operator, key switch, throttle, manual choke, BBC switch, hour meter with maintenance reminders
Forward Speed Range:	0 – 10 mph
Reverse Speed Range:	0 – 5 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	7-gauge steel with .25-inch spindle reinforcement
Cutting Width:	60"
Cutting Height Adjustment:	Foot-operated pedal adjustment from operator's seat, dial height of cut makes it easy to change cutting height by simply rotating the dial to the desired height of cut
Cutting Height:	1.5-5.5" in ¼" increments, 17 positions
Blade Engagement:	Ogura® GT2.5 Electric Clutch
Discharge Chute:	Flip-up, flexible rubber chute for strength and durability, minimizes damage to landscape and trees, and eases transport of the machine
Front Caster Wheels:	Smooth 13 x 6.5 – 6 pneumatic
Spindles:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Spindle Pulleys:	Split steel design for strength and durability
Constant Belt Tension System:	The CBT system, exclusive to Gravely, ensures constant belt tension and consistent blade tip speed
Cutter Deck Belts:	Hex belt, has the ability to run on both sides
Blades:	3–20.5"
Blade Tip Speed:	18,000 fpm

ADDITIONAL SPECIFICATIONS

ROPS:	Foldable ROPS is standard, retractable seatbelt included
Seat:	High Back w/ Full Suspension
Cup Holder:	Molded into left fuel tank
Paint:	Powder-coat paint

DIMENSIONS

Length:	78.5"
Width:	75"
Width (with discharge in transport position):	63"
Height with ROPS:	71"
Weight:	1110 lbs.

WARRANTY

Commercial:	5 Year or 1000 Hour Limited Commercial Warranty (No hour limit first two years)
Frame and Deck shell:	Limited Lifetime Frame and Deck shell Warranty

OPTIONAL ACCESSORIES:

2-Bucket Powered Bagger	891007
Mulching Kit	791059
Striping Kit	792067
Trailer Hitch Kit	792158
Headlight Kit	792162
Hard Top Sunshade Kit	792180
Rear Wheel Covers	791021
Front Wheel Covers	792106
Operator Controlled Discharge Baffle	792154
Radial Tire Drive Conversion Kit	792153
2-Bucket Bagger Completion Kit	791062
Gravelly Equipment Cover	715153
Laser Edge Blade Kit	792194
Laser Edge Mulch Blade Kit	792200

Pro-Turn ZX 48

Model Number: 991286

ENGINE

Brand:	Kawasaki®
Model:	FX691V
Horsepower:	22
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	726 cc
Cylinder:	Cast-iron cylinder liners
Air Cleaner:	Cyclonic Air Cleaner
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	5 GAL/18.9 L
Drive Wheels / Tires:	Turf 22 x 10 – 12
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 2.5" tubular frame
Foot Plate:	Steel with extrusions to prevent slipping, flip up for ease of belt maintenance

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Hydro-Gear® ZT-3200
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting, self-tightening
Brakes:	Lever actuated, debris free internal brake
Axles:	Robust 1.125-inch shaft for greater strength
Instrument Panel:	Mounted on the right-hand side of the operator, key switch, throttle, manual choke, BBC switch, hour meter with maintenance reminders
Forward Speed Range:	0 – 8.5 mph
Reverse Speed Range:	0 – 4 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	10-gauge steel with .25-inch spindle reinforcement
Cutting Width:	48"
Cutting Height Adjustment:	Foot-operated pedal adjustment from operator's seat, dial height of cut makes it easy to change cutting height by simply rotating the dial to the desired height of cut
Cutting Height:	1.5-5" in ¼" increments, 15 positions
Blade Engagement:	Ogura® GT1.5 Electric Clutch
Discharge Chute:	Flip-up, flexible rubber chute for strength and durability, minimizes damage to landscape and trees, and eases transport of the machine
Front Caster Wheels:	Smooth 13 x 6.5 – 6 pneumatic
Spindles:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Spindle Pulleys:	Split steel design for strength and durability
Constant Belt Tension System:	The CBT system, exclusive to Gravely, ensures constant belt tension and consistent blade tip speed
Cutter Deck Belts:	Hex belt, has the ability to run on both sides
Blades:	3–16.5"
Blade Tip Speed:	17,500 fpm

ADDITIONAL SPECIFICATIONS

ROPS:	Foldable ROPS is standard, retractable seatbelt included
Seat:	High Back Suspension Seat
Caster Forks:	Suspension
Cup Holder:	Molded into left fuel tank
Paint:	Powder-coat paint

DIMENSIONS

Length:	79"
Width W/O Chute:	50.8"
Height with ROPS:	72.5"
Weight:	925 lbs.

WARRANTY

Commercial:	4 Year or 750 Hour Limited Commercial Warranty
-------------	--

OPTIONAL ACCESSORIES:

2-Bucket Powered Bagger	891008
Operator Discharge Cute Baffle	792216
Trailer Hitch Kit	791085
Headlight Kit	791068
Sunshade Kit	792126
Bagger Mount Kit	791063
Mulching Kit	791096
Gravelly Equipment Cover	715153
Laser Edge Blade Kit	792192
Laser Edge Mulch Blade Kit	792198
Seat Cover	715155
Suspension Seat Kit	791077

Pro-Turn ZX 52

Model Number: 991288

ENGINE

Brand:	Kawasaki®
Model:	FX691V
Horsepower:	22
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	726 cc
Cylinder:	Cast-iron cylinder liners
Air Cleaner:	Cyclonic Air Cleaner
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	5 GAL/18.9 L
Drive Wheels / Tires:	Turf 22 x 10.5 – 12
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 2.5" tubular frame
Foot Plate:	Steel with extrusions to prevent slipping, flip up for ease of belt maintenance

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Hydro-Gear® ZT-3200
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting, self-tightening
Brakes:	Lever actuated, debris free internal brake
Axles:	Robust 1.125-inch shaft for greater strength
Instrument Panel:	Mounted on the right-hand side of the operator, key switch, throttle, manual choke, BBC switch, hour meter with maintenance reminders
Forward Speed Range:	0 – 8.5 mph
Reverse Speed Range:	0 – 4 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	10-gauge steel with .25-inch spindle reinforcement
Cutting Width:	52"
Cutting Height Adjustment:	Foot-operated pedal adjustment from operator's seat, dial height of cut makes it easy to change cutting height by simply rotating the dial to the desired height of cut
Cutting Height:	1.5-5" in ¼" increments, 15 positions
Blade Engagement:	Ogura® GT1.5 Electric Clutch
Discharge Chute:	Flip-up, flexible rubber chute for strength and durability, minimizes damage to landscape and trees, and eases transport of the machine
Front Caster Wheels:	Smooth 13 x 6.5 – 6 pneumatic
Spindles:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Spindle Pulleys:	Split steel design for strength and durability
Constant Belt Tension System:	The CBT system, exclusive to Gravely, ensures constant belt tension and consistent blade tip speed
Cutter Deck Belts:	Hex belt, has the ability to run on both sides
Blades:	3–18"
Blade Tip Speed:	17,500 fpm

ADDITIONAL SPECIFICATIONS

ROPS:	Foldable ROPS is standard, retractable seatbelt included
Seat:	High Back Suspension Seat
Caster Forks:	Suspension
Cup Holder:	Molded into left fuel tank
Paint:	Powder-coat paint

DIMENSIONS

Length:	79"
Width W/O Chute:	56.2"
Height with ROPS:	72"
Weight:	931 lbs.

WARRANTY

Commercial:	4 Year or 750 Hour Limited Commercial Warranty
-------------	--

OPTIONAL ACCESSORIES:

2-Bucket Powered Bagger	891008
Floor mat	791106
Operator Controlled Discharge Baffle	792216
Trailer Hitch Kit	792023
Headlight Kit	791068
Sunshade Kit	792126
Mulching Kit	792202
LaserEdge Blade Kit	791101
Bagger Mount Kit	791065
Gravelly Equipment Cover	715153
Seat Cover	715155
Suspension Seat Kit	791077

Pro-Turn ZX 60

Model Number: 991290

ENGINE

Brand:	Kawasaki®
Model:	FX730V
Horsepower:	23.5
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	726 cc
Cylinder:	Cast-iron cylinder liners
Air Cleaner:	Cyclonic Air Cleaner
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	5 GAL/18.9 L
Drive Wheels / Tires:	Turf 22 x 12 – 12
Parking Break:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 2.5" tubular frame
Foot Plate:	Steel with extrusions to prevent slipping, flip up for ease of belt maintenance

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Hydro-Gear® ZT-3200
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting, self-tightening
Brakes:	Lever actuated, debris free internal brake
Axles:	Robust 1.125-inch shaft for greater strength
Instrument Panel:	Mounted on the right-hand side of the operator, key switch, throttle, manual choke, BBC switch, hour meter with maintenance reminders
Forward Speed Range:	0 – 8.5 mph
Reverse Speed Range:	0 – 4 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	10-gauge steel with .25-inch spindle reinforcement
Cutting Width:	60"
Cutting Height Adjustment:	Foot-operated pedal adjustment from operator's seat, dial height of cut makes it easy to change cutting height by simply rotating the dial to the desired height of cut
Cutting Height:	1.5-5" in ¼" increments, 15 positions
Blade Engagement:	Ogura® GT3.1 Electric Clutch
Discharge Chute:	Flip-up, flexible rubber chute for strength and durability, minimizes damage to landscape and trees, and eases transport of the machine
Front Caster Wheels:	Smooth 13 x 6.5 – 6 pneumatic
Spindles:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Spindle Pulleys:	Split steel design for strength and durability
Constant Belt Tension System:	The CBT system, exclusive to Gravely, ensures constant belt tension and consistent blade tip speed
Cutter Deck Belts:	Hex belt, has the ability to run on both sides
Blades:	3–20.5"
Blade Tip Speed:	17,500 fpm

ADDITIONAL SPECIFICATIONS

ROPS:	Foldable ROPS is standard, retractable seatbelt included
Seat:	High Back Suspension Seat
Caster Forks:	Suspension
Cup Holder:	Molded into left fuel tank
Paint:	Powder-coat paint

DIMENSIONS

Length:	79"
Width W/O Chute:	63.7"
Height with ROPS:	74.8"
Weight:	952 lbs.

WARRANTY

Commercial:	4 Year or 750 Hour Limited Commercial Warranty
-------------	--

OPTIONAL ACCESSORIES:

2-Bucket Powered Bagger	891008
Floormat	791106
Operator Controlled Discharge Baffle	792216
Trailer Hitch Kit	791085
Headlight Kit	791068
Sunshade Kit	792126
Mulching Kit	791098
Bagger Mount Kit	791066
Gravelly Equipment Cover	715153
Seat Cover	715155
Suspension Seat Kit	791077
LaserEdge Blade Kti	791102

Compact-Pro 34

Model Number: 991144

ENGINE

Brand:	Kawasaki®
Model:	FX481V
Horsepower:	15.5
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	603 cc
Cylinder:	Cast-iron cylinder liners
Air Cleaner:	Dual stage canister air filter
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	7.2 GAL/27.3 L
Drive Wheels / Tires:	21 x 7 – 10 Turf
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty welded tubular frame
Foot Plate:	Steel with extrusions to prevent slipping

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Hydro-Gear® ZT-3100 Transaxles
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting, self-tightening
Instrument Panel:	Mounted on the right-hand side of the operator, key switch, throttle, manual choke, BBC switch, hour meter with maintenance reminders
Forward Speed Range:	0 – 7 mph
Reverse Speed Range:	0 – 3 mph

CUTTING DECK

Type:	Floating, adjustable
Construction:	10-gauge steel with 10-gauge spindle reinforcement
Cutting Width:	34"
Cutting Height Adjustment:	Foot-operated pedal adjustment with pin system to adjust from operator's seat
Cutting Height:	1-5" in ½" increments, 17 positions
Blade Engagement:	Electric Ogura® GT1.5 clutch break with control panel knob
Discharge Chute:	Durable steel chute
Front Caster Wheels:	13 x 5 – 6 pneumatic
Spindles:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Spindle Pulleys:	Split steel design for strength and durability
Cutter Deck Belts:	Hex belt, has the ability to run on both sides
Blades:	2–17"
Blade Tip Speed:	17,270 fpm

ADDITIONAL SPECIFICATIONS

Seat:	High Back w/ EVC Suspension
Cup Holder:	Molded into left fuel tank
Paint:	Powder-coat paint

DIMENSIONS

Length:	75"
Width (with discharge in transport position):	35.9"
Height:	45.3"
Weight:	737 lbs.

WARRANTY

Commercial:	4 Year or 750 Hour Limited Commercial Warranty (No hour limit first two years)
-------------	---

OPTIONAL ACCESSORIES:

Grass Catcher	788043
Trailer Hitch Kit	792181
Headlight Kit	792183
Rear Wheel Covers	791020
Front Wheel Covers	792106
Grass Mulching Kit	788072
Folding ROPS	891010
Leaf Collector	788044
Gravelly Equipment Cover	715153
Laser Edge Blade Kit	792193
Laser Edge Mulch Blade Kit	792199

Compact-Pro 44

Model Number: 991145

ENGINE

Brand:	Kawasaki®
Model:	FX600V
Horsepower:	19
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	603 cc
Cylinder:	Cast-iron cylinder liners
Air Cleaner:	Dual stage canister air filter
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	7.2 GAL/27.3 L
Drive Wheels / Tires:	20.5 x 6.5 – 6 Turf
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty welded tubular frame
Foot Plate:	Steel with extrusions to prevent slipping

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Hydro-Gear® ZT-3100 Transaxles
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting, self-tightening
Instrument Panel:	Mounted on the right-hand side of the operator, key switch, throttle, manual choke, BBC switch, hour meter with maintenance reminders
Forward Speed Range:	0 – 7 mph
Reverse Speed Range:	0 – 3 mph

CUTTING DECK

Type:	Floating, adjustable
Construction:	10-gauge steel with 10-gauge spindle reinforcement
Cutting Width:	43.5"
Cutting Height Adjustment:	Foot-operated pedal adjustment with pin system to adjust from operator's seat
Cutting Height:	1-5" in ½" increments, 17 positions
Blade Engagement:	Electric Ogura® GT1.5 clutch break with control panel knob
Discharge Chute:	Durable steel chute
Front Caster Wheels:	13 x 6.5 – 6 pneumatic
Spindles:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Spindle Pulleys:	Split steel design for strength and durability
Cutter Deck Belts:	Hex belt, has the ability to run on both sides
Blades:	3–15"
Blade Tip Speed:	17,270 fpm

ADDITIONAL SPECIFICATIONS

Seat:	High Back w/ EVC Suspension
Cup Holder:	Molded into left fuel tank
Paint:	Powder-coat paint

DIMENSIONS

Length:	75"
Width (with discharge in transport position):	46.7"
Height:	45.3"
Weight:	789 lbs.

WARRANTY

Commercial:	4 Year or 750 Hour Limited Commercial Warranty (No hour limit first two years)
-------------	---

OPTIONAL ACCESSORIES:

Grass Catcher Kit	788043
LED Headlight Kit	792183
Trailer Hitch Kit	792181
Rear Wheel Covers	791020
Front Wheel Covers	792106
Grass Mulching Kit	791067
Folding ROPS	891010
Gravelly Equipment Cover	715153
Laser Edge Blade Kit	792192
Laser Edge Mulch Blade Kit	792198

Z-Stance 32

Model Number: 994160

ENGINE

Brand:	Kawasaki®
Model:	FS600 V-Twin
Horsepower:	18.5
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	603 cc
Cylinder:	Cast-iron cylinder liners
Air Cleaner:	Dual stage canister air filter
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	4.5 GAL/ 17 L
Drive Wheels / Tires:	20 x 6.5 – 8
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 2.5" tubular frame
Foot Platform:	Flip-up suspension platform guarantees all day standing comfort and allows you to easily convert this stand-on to a walk-behind

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Hydro-Gear® ZT-3100
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting
Brakes:	Lever actuated, debris free internal brake
Axles:	Robust 1.125-inch shaft for greater strength
Instrument Panel:	Mounted on the dash of the stand on, key switch, throttle, manual choke, PTO switch, hour meter with maintenance reminders
Forward Speed Range:	0 – 7 mph
Reverse Speed Range:	0 – 3 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	7-gauge steel
Cutting Width:	32"
Cutting Height Adjustment:	Simple and very visible from the operator pad, pin style height of cut selector.
Cutting Height:	2-5" in ¼" increments, 13 positions
Blade Engagement:	Ogura® GT1.5 Electric Clutch
Discharge Chute:	Removable, flexible rubber chute for strength and durability, minimizes damage to landscape and trees
Front Caster Wheels:	11 x 5 – 6 pneumatic
Spindles:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Spindle Pulleys:	Split steel design for strength and durability
Cutter Deck Belts:	V-Belt
Blades:	2–16.5"
Blade Tip Speed:	16,904 fpm

DIMENSIONS

Length:	65.5"
Width:	44.8"
Width (with chute in transport position):	32.8"
Height:	47.5"
Weight:	669 lbs.

WARRANTY

Commercial:	4 Year or 500 Hour Limited Commercial Warranty
Frame and Deck shell:	Limited Lifetime Frame and Deck shell Warranty

OPTIONAL ACCESSORIES:

Mulching Kit	794032
Operator Controlled Discharge Baffle	794034
Light Kit	794028
Trimmer Mount Kit	794035
Bucket Mounting Kit	794037

Z-Stance 48

Model Number: 994159

ENGINE

Brand:	Kawasaki®
Model:	FS651 V-Twin
Horsepower:	22
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	726 cc
Cylinder:	Cast-iron cylinder liners
Air Cleaner:	Dual stage canister air filter
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	4.5 GAL/17 L
Drive Wheels / Tires:	20 x 6.5 – 8
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 2.5" tubular frame
Foot Platform:	Flip-up suspension platform guarantees all day standing comfort and allows you to easily convert this stand-on to a walk-behind

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Hydro-Gear® ZT-3100
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting
Brakes:	Lever actuated, debris free internal brake
Axles:	Robust 1.125-inch shaft for greater strength
Instrument Panel:	Mounted on the dash of the stand on, key switch, throttle, manual choke, PTO switch, hour meter with maintenance reminders
Forward Speed Range:	0 – 7 mph
Reverse Speed Range:	0 – 3 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	10-gauge steel
Cutting Width:	48"
Cutting Height Adjustment:	Simple and very visible from the operator pad, pin style height of cut selector.
Cutting Height:	1.5-5" in ¼" increments, 15 positions
Blade Engagement:	Ogura® GT1.5 Electric Clutch
Discharge Chute:	Removable, flexible rubber chute for strength and durability, minimizes damage to landscape and trees
Front Caster Wheels:	11 x 5 – 6 pneumatic
Spindles:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Spindle Pulleys:	Split steel design for strength and durability
Cutter Deck Belts:	V-Belt
Blades:	3–16.5"
Blade Tip Speed:	18,000 fpm

DIMENSIONS

Length:	65.5"
Width:	61"
Width (with chute in transport position):	49.5"
Height:	47.5"
Weight:	744 lbs.

WARRANTY

Commercial:	4 Year or 500 Hour Limited Commercial Warranty
Frame and Deck shell:	Limited Lifetime Frame and Deck shell Warranty

OPTIONAL ACCESSORIES:

Mulching Kit	791096
Operator Controlled Discharge Baffle	794045
LaserEdge Blades- 3 Pk.	792192
Light Kit	794028
Rear Tweels	794041
Trimmer Mount Kit	794035
Bucket Mounting Kit	794037

Z-Stance 52

Model Number: 994158

ENGINE

Brand:	Kawasaki®
Model:	FS651 V-Twin
Horsepower:	22
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	726 cc
Cylinder:	Cast-iron cylinder liners
Air Cleaner:	Dual stage canister air filter
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	4.5 GAL/17 L
Drive Wheels / Tires:	20 x 6.5 – 8
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	Heavy duty 1.5" x 2.5" tubular frame
Foot Platform:	Flip-up suspension platform guarantees all day standing comfort and allows you to easily convert this stand-on to a walk-behind

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Hydro-Gear® ZT-3100
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting
Brakes:	Lever actuated, debris free internal brake
Axles:	Robust 1.125-inch shaft for greater strength
Instrument Panel:	Mounted on the dash of the stand on, key switch, throttle, manual choke, PTO switch, hour meter with maintenance reminders
Forward Speed Range:	0 – 7 mph
Reverse Speed Range:	0 – 3 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	10-gauge steel
Cutting Width:	52"
Cutting Height Adjustment:	Simple and very visible from the operator pad, pin style height of cut selector.
Cutting Height:	1.5-5" in ¼" increments, 15 positions
Blade Engagement:	Ogura® GT1.5 Electric Clutch
Discharge Chute:	Removable, flexible rubber chute for strength and durability, minimizes damage to landscape and trees
Front Caster Wheels:	11 x 5 – 6 pneumatic
Spindles:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Spindle Pulleys:	Split steel design for strength and durability
Cutter Deck Belts:	V-Belt
Blades:	3–18"
Blade Tip Speed:	18,500 fpm

DIMENSIONS

Length:	65.5"
Width:	66.75"
Width (with chute in transport position):	55"
Height:	47.5"
Weight:	763 lbs.

WARRANTY

Commercial:	4 Year or 500 Hour Limited Commercial Warranty
Frame and Deck shell:	Limited Lifetime Frame and Deck shell Warranty

OPTIONAL ACCESSORIES:

Mulching Kit	792202
Operator Controlled Discharge Baffle	794045
LaserEdge Blades- 3 Pk.	792193
Light Kit	794028
Rear Tweels	794041
Poly Side Bagger	794048
Trimmer Mount Kit	794035
Bucket Mounting Kit	794037

Pro-Stance 32

Model Number: 994157

ENGINE

Brand:	Kawasaki®
Model:	FS600 V-Twin
Horsepower:	18.5
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	603 cc
Cylinder:	Cast-iron cylinder liners
Air Cleaner:	Dual stage canister air filter
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	6 GAL/22.7 L
Drive Wheels / Tires:	Radial 18 x 6.5- 8
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	1.5" x 2.5" tubular frame
Foot Platform:	Flip-up suspension platform with rubber isolators, guarantees all day standing comfort and allows you to easily convert this stand-on to a walk-behind

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Hydro-Gear® ZT-3100
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting
Brakes:	Lever actuated, debris free internal brake
Axles:	Robust 1.125-inch shaft for greater strength
Instrument Panel:	Mounted on the dash of the stand on, key switch, throttle, manual choke, PTO switch, hour meter with maintenance reminders, fuel gauge on tank
Forward Speed Range:	0 - 8 mph
Reverse Speed Range:	0 - 3 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	7-gauge steel
Cutting Width:	32"
Cutting Height Adjustment:	Simple and very visible from the operator pad, pin style height of cut selector.
Cutting Height:	1.5-5" in ¼" increments, 15 positions
Blade Engagement:	Ogura® GT2.75A Electric Clutch
Discharge Chute:	Removable, flexible rubber chute for strength and durability, minimizes damage to landscape and trees
Front Caster Wheels:	11 x 4 - 5 semi-pneumatic
Spindles:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Spindle Pulleys:	Split steel design for strength and durability
Constant Belt Tension System:	The CBT system, exclusive to Gravely, ensures constant belt tension and consistent blade tip speed
Cutter Deck Belts:	V-Belt
Blades:	2-18"
Blade Tip Speed:	18,220 fpm

DIMENSIONS

Length:	59.5"
Width:	49"
Width (with discharge in transport position):	33.5"
Height:	48"
Weight:	750 lbs.

WARRANTY

Commercial:	5 Year or 1000 Hour Limited Commercial Warranty (No hour limit first two years)
Frame and Deckshell:	Limited Lifetime Frame and Deckshell Warranty

OPTIONAL ACCESSORIES:

Mulching Kit	794032
Operator Controlled Discharge Baffle	794034
Light Kit	794028
Trimmer Mount Kit	794038
Bucket Mounting Kit	794037
Pack Blower Mounting Kit	794036

Pro-Stance 36

Model Number: 994149

ENGINE

Brand:	Kawasaki®
Model:	FS600 V-Twin
Horsepower:	18.5
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	603 cc
Cylinder:	Cast-iron cylinder liners
Air Cleaner:	Dual stage canister air filter
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	6 GAL/22.7 L
Drive Wheels / Tires:	Radial 18 x 8.5- 8
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	1.5" x 2.5" tubular frame
Foot Platform:	Flip-up suspension platform with rubber isolators, guarantees all day standing comfort and allows you to easily convert this stand-on to a walk-behind

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Hydro-Gear® ZT-3100
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting
Brakes:	Lever actuated, debris free internal brake
Axles:	Robust 1.125-inch shaft for greater strength
Instrument Panel:	Mounted on the dash of the stand on, key switch, throttle, manual choke, PTO switch, hour meter with maintenance reminders, fuel gauge on tank
Forward Speed Range:	0 - 8 mph
Reverse Speed Range:	0 - 3 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	7-gauge steel
Cutting Width:	36"
Cutting Height Adjustment:	Simple and very visible from the operator pad, pin style height of cut selector.
Cutting Height:	1.5-5" in ¼" increments, 15 positions
Blade Engagement:	Ogura® GT2.75A Electric Clutch
Discharge Chute:	Removable, flexible rubber chute for strength and durability, minimizes damage to landscape and trees
Front Caster Wheels:	11 x 4 - 5 semi-pneumatic
Spindles:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Spindle Pulleys:	Split steel design for strength and durability
Constant Belt Tension System:	The CBT system, exclusive to Gravely, ensures constant belt tension and consistent blade tip speed
Cutter Deck Belts:	V-Belt
Blades:	2-18"
Blade Tip Speed:	18,220 fpm

DIMENSIONS

Length:	59.5"
Width:	49"
Width (with discharge in transport position):	36.5"
Height:	48"
Weight:	784 lbs.

WARRANTY

Commercial:	5 Year or 1000 Hour Limited Commercial Warranty (No hour limit first two years)
Frame and Deckshell:	Limited Lifetime Frame and Deckshell Warranty

OPTIONAL ACCESSORIES:

Mulching Kit	794033
Operator Controlled Discharge Baffle	794034
Light Kit	794028
Trimmer Mount Kit	794038
Bucket Mounting Kit	794037
Pack Blower Mounting Kit	794036
Side Grass Catcher	788043

Pro-Stance 48

Model Number: 994161

ENGINE

Brand:	Kawasaki®
Model:	FX 730 V-Twin
Horsepower:	23.5
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	726 cc
Cylinder:	Cast-iron cylinder liners
Air Cleaner:	Dual stage canister air filter
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	9 GAL/34.1 L
Drive Wheels / Tires:	Radial 20 x 10.5 – 8
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	1.5" x 2.5" tubular frame
Foot Platform:	Flip-up suspension platform with rubber isolators, guarantees all day standing comfort and allows you to easily convert this stand-on to a walk-behind

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Hydro-Gear® ZT-3400
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting
Brakes:	Lever actuated, debris free internal brake
Axles:	Robust 1.125-inch shaft for greater strength
Instrument Panel:	Mounted on the dash of the stand on, key switch, throttle, manual choke, PTO switch, hour meter with maintenance reminders, fuel gauge on tank
Forward Speed Range:	0 – 9 mph
Reverse Speed Range:	0 – 4 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	7-gauge steel
Cutting Width:	48"
Cutting Height Adjustment:	Simple and very visible from the operator pad, pin style height of cut selector.
Cutting Height:	1.5-5" in ¼" increments, 15 positions
Blade Engagement:	Ogura® GT2.75A Electric Clutch
Discharge Chute:	Removable, flexible rubber chute for strength and durability, minimizes damage to landscape and trees
Front Caster Wheels:	13 x 6.5 – 6 semi-pneumatic
Spindles:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Spindle Pulleys:	Split steel design for strength and durability
Constant Belt Tension System:	The CBT system, exclusive to Gravely, ensures constant belt tension and consistent blade tip speed
Cutter Deck Belts:	V-Belt
Blades:	3–16.19"
Blade Tip Speed:	18,000 fpm

DIMENSIONS

Length:	60.63"
Width:	62.25"
Width (with discharge in transport position):	50"
Height:	48"
Weight:	995 lbs.

WARRANTY

Commercial:	5 Year or 1000 Hour Limited Commercial Warranty (No hour limit first two years)
Frame and Deck shell:	Limited Lifetime Frame and Deck shell Warranty

OPTIONAL ACCESSORIES:

Mulching Kit	791096
Operator Controlled Discharge Baffle	794045
Light Kit	794028
Trimmer Mount Kit	794035
Bucket Mounting Kit	794037
Pack Blower Mounting Kit	794036
LaserEdge Mulch Blade Kit	792198

Pro-Stance 52

Model Number: 994162

ENGINE

Brand:	Kawasaki®
Model:	FX730 V-Twin
Horsepower:	23.5
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	726 cc
Cylinder:	Cast-iron cylinder liners
Air Cleaner:	Dual stage canister air filter
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	9 GAL/34.1 L
Drive Wheels / Tires:	Radial 20 x 10.5 – 8
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	1.5" x 2.5" tubular frame
Foot Platform:	Flip-up suspension platform with rubber isolators, guarantees all day standing comfort and allows you to easily convert this stand-on to a walk-behind

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Hydro-Gear® ZT-3400
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting
Brakes:	Lever actuated, debris free internal brake
Axles:	Robust 1.125-inch shaft for greater strength
Instrument Panel:	Mounted on the dash of the stand on, key switch, throttle, manual choke, PTO switch, hour meter with maintenance reminders, fuel gauge on tank
Forward Speed Range:	0 – 9 mph
Reverse Speed Range:	0 – 4 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	7-gauge steel
Cutting Width:	52"
Cutting Height Adjustment:	Simple and very visible from the operator pad, pin style height of cut selector.
Cutting Height:	1.5-5" in ¼" increments, 15 positions
Blade Engagement:	Ogura® GT2.75A Electric Clutch
Discharge Chute:	Removable, flexible rubber chute for strength and durability, minimizes damage to landscape and trees
Front Caster Wheels:	13 x 6.5 – 6 semi-pneumatic
Spindles:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Spindle Pulleys:	Split steel design for strength and durability
Constant Belt Tension System:	The CBT system, exclusive to Gravelly, ensures constant belt tension and consistent blade tip speed
Cutter Deck Belts:	V-Belt
Blades:	3–18"
Blade Tip Speed:	18,000 fpm

DIMENSIONS

Length:	60.63"
Width:	67.75"
Width (with discharge in transport position):	55.5"
Height:	48"
Weight:	1015 lbs.

WARRANTY

Commercial:	5 Year or 1000 Hour Limited Commercial Warranty (No hour limit first two years)
Frame and Deck shell:	Limited Lifetime Frame and Deck shell Warranty

OPTIONAL ACCESSORIES:

Mulching Kit	794026
Operator Controlled Discharge Baffle	794044
Light Kit	794028
Trimmer Mount Kit	794035
Bucket Mounting Kit	794037
Pack Blower Mounting Kit	794036
Tweel Kit	794041
LaserEdge Blade Kit	792193
LaserEdge Mulch Blade Kit	792199

Pro-Stance 52

Model Number: 994163

ENGINE

Brand:	Kawasaki®
Model:	FT 730 V-Twin EFI
Horsepower:	26
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	726 cc
Cylinder:	Cast-iron cylinder liners
Air Cleaner:	Dual stage canister air filter
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	9 GAL/34.1 L
Drive Wheels / Tires:	Radial 20 x 10.5 – 8
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	1.5" x 2.5" tubular frame
Foot Platform:	Flip-up suspension platform with rubber isolators, guarantees all day standing comfort and allows you to easily convert this stand-on to a walk-behind

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Hydro-Gear® ZT-3400
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting
Brakes:	Lever actuated, debris free internal brake
Axles:	Robust 1.125-inch shaft for greater strength
Instrument Panel:	Mounted on the dash of the stand on, key switch, throttle, manual choke, PTO switch, hour meter with maintenance reminders, fuel gauge on tank
Forward Speed Range:	0 – 9 mph
Reverse Speed Range:	0 – 4 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	7-gauge steel
Cutting Width:	52"
Cutting Height Adjustment:	Simple and very visible from the operator pad, pin style height of cut selector.
Cutting Height:	1.5-5" in ¼" increments, 15 positions
Blade Engagement:	Ogura® GT2.75 A Electric Clutch
Discharge Chute:	Removable, flexible rubber chute for strength and durability, minimizes damage to landscape and trees
Front Caster Wheels:	13 x 6.5 – 6 semi-pneumatic
Spindles:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Spindle Pulleys:	Split steel design for strength and durability
Constant Belt Tension System:	The CBT system, exclusive to Gravelly, ensures constant belt tension and consistent blade tip speed
Cutter Deck Belts:	V-Belt
Blades:	3–18"
Blade Tip Speed:	18,000 fpm

DIMENSIONS

Length:	60.63"
Width:	67.75"
Width (with discharge in transport position):	55.5"
Height:	48"
Weight:	1015 lbs.

WARRANTY

Commercial:	5 Year or 1000 Hour Limited Commercial Warranty (No hour limit first two years)
Frame and Deck shell:	Limited Lifetime Frame and Deck shell Warranty

OPTIONAL ACCESSORIES:

Mulching Kit	792202
Operator Controlled Discharge Baffle	794045
Light Kit	794028
Trimmer Mount Kit	794035
Bucket Mounting Kit	794037
Poly Side Bagger	794048
LaserEdge Blade Kit	792193

Pro-Stance 60

Model Number: 994164

ENGINE

Brand:	Kawasaki®
Model:	FX 730 V-Twin
Horsepower:	23.5
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	726 cc
Cylinder:	Cast-iron cylinder liners
Air Cleaner:	Dual stage canister air filter
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	9 GAL/34.1 L
Drive Wheels / Tires:	Radial 20 x 10.5 – 8
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	1.5" x 2.5" tubular frame
Foot Platform:	Flip-up suspension platform with rubber isolators, guarantees all day standing comfort and allows you to easily convert this stand-on to a walk-behind

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Hydro-Gear® ZT-3400
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting
Brakes:	Lever actuated, debris free internal brake
Axles:	Robust 1.125-inch shaft for greater strength
Instrument Panel:	Mounted on the dash of the stand on, key switch, throttle, manual choke, PTO switch, hour meter with maintenance reminders, fuel gauge on tank
Forward Speed Range:	0 – 9 mph
Reverse Speed Range:	0 – 4 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	7-gauge steel
Cutting Width:	60"
Cutting Height Adjustment:	Simple and very visible from the operator pad, pin style height of cut selector
Cutting Height:	1.5-5" in ¼" increments, 15 positions
Blade Engagement:	Ogura® GT2.75 Electric Clutch
Discharge Chute:	Removable, flexible rubber chute for strength and durability, minimizes damage to landscape and trees
Front Caster Wheels:	13 x 6.5 – 6 semi-pneumatic
Spindles:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Spindle Pulleys:	Split steel design for strength and durability
Constant Belt Tension System:	The CBT system, exclusive to Gravely, ensures constant belt tension and consistent blade tip speed
Cutter Deck Belts:	V-Belt
Blades:	3–20.5"
Blade Tip Speed:	18,000 fpm

DIMENSIONS

Length:	62"
Width:	75.25"
Width (with discharge in transport position):	63"
Height:	48"
Weight:	1043 lbs.

WARRANTY

Commercial:	5 Year or 1000 Hour Limited Commercial Warranty (No hour limit first two years)
Frame and Deck shell:	Limited Lifetime Frame and Deck shell Warranty

OPTIONAL ACCESSORIES:

Mulching Kit	794047
Operator Controlled Discharge Baffle	794045
Light Kit	794028
Trimmer Mount Kit	794035
Bucket Mounting Kit	794037
Poly Side Bagger	794048
LaserEdge Blade Kit	792194

Pro-Stance 60

Model Number: 994165

ENGINE

Brand:	Kawasaki®
Model:	FT 730 V-Twin EFI
Horsepower:	26
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	726 cc
Cylinder:	Cast-iron cylinder liners
Air Cleaner:	Dual stage canister air filter
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	9 GAL/34.1 L
Drive Wheels / Tires:	Radial 20 x 10.5 – 8
Parking Brake:	Lever operated interlock parking brake prevents operation with parking brake engaged
Frame:	1.5" x 2.5" tubular frame
Foot Platform:	Flip-up suspension platform with rubber isolators, guarantees all day standing comfort and allows you to easily convert this stand-on to a walk-behind

DRIVE SYSTEM

Type:	Integrated pump and wheel motor transmissions
Transmission:	Hydro-Gear® ZT-3400
Steering/Travel Control:	Large diameter, adjustable control arms with isolators to reduce vibration from the frame
Transmission Belt Idler:	Self-adjusting
Brakes:	Lever actuated, debris free internal brake
Axles:	Robust 1.125-inch shaft for greater strength
Instrument Panel:	Mounted on the dash of the stand on, key switch, throttle, manual choke, PTO switch, hour meter with maintenance reminders, fuel gauge on tank
Forward Speed Range:	0 – 9 mph
Reverse Speed Range:	0 – 4 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	7-gauge steel
Cutting Width:	60"
Cutting Height Adjustment:	Simple and very visible from the operator pad, pin style height of cut selector.
Cutting Height:	1.5-5" in ¼" increments, 15 positions
Blade Engagement:	Ogura® GT1A Electric Clutch
Discharge Chute:	Removable, flexible rubber chute for strength and durability, minimizes damage to landscape and trees
Front Caster Wheels:	13 x 6.5 – 6 semi-pneumatic
Spindles:	Heavy-duty spindle shaft, with forged aluminum housing, ball bearings, maintenance-free design
Spindle Pulleys:	Split steel design for strength and durability
Constant Belt Tension System:	The CBT system, exclusive to Gravely, ensures constant belt tension and consistent blade tip speed
Cutter Deck Belts:	V-Belt
Blades:	3–20.5"
Blade Tip Speed:	18,500 fpm

DIMENSIONS

Length:	62"
Width:	75.25"
Width (with discharge in transport position):	63"
Height:	48"
Weight:	1048 lbs.

WARRANTY

Commercial:	5 Year or 1000 Hour Limited Commercial Warranty (No hour limit first two years)
Frame and Deck shell:	Limited Lifetime Frame and Deck shell Warranty

OPTIONAL ACCESSORIES:

Mulching Kit	794047
Operator Controlled Discharge Baffle	794045
Light Kit	794028
Trimmer Mount Kit	794035
Bucket Mounting Kit	794037
Poly Side Bagger	794048
LaserEdge Blade Kit	792194

Pro-Walk 36

Model Number: 988184

ENGINE

Brand:	Kawasaki®
Model:	FS481V
Horsepower:	14.5
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	603 cc
Cylinder:	Cast-iron cylinder liners
Air Cleaner:	Dual element air filter
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	5.8 GAL/22 L
Drive Wheels / Tires:	21 x 7 - 10
Frame:	Tubular welded steel
Handlebar Style:	Ergonomic controls with adjustable handlebar height

DRIVE SYSTEM

Type:	Integrated Pump and Wheel Motor
Transmission:	Hydro-Gear® ZT-2800
Steering/Travel Control:	Ergonomic controls for improved operator comfort
Brakes:	Lever actuated wet disc brake, internal to transmission, assures maximum brake-holding capacity
Axles:	1.0" Diameter
Forward Speed Range:	0 - 8 mph
Reverse Speed Range:	0 - 3 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	10-gauge steel
Cutting Width:	36"
Cutting Height Adjustment:	Single-point Height of Cut for easy adjustments
Cutting Height:	1.5-4.5" in ¼" increments, 13 positions
Blade Engagement:	Electric Clutch
Discharge Chute:	Flip up, flexible rubber chute for strength and durability, minimizes damage to landscape and trees and eases transport of the machine
Front Caster Wheels:	11 x 4 - 5 semi-pneumatic tires
Spindles:	Maintenance-free spindles with aluminum housings provide better heat dissipation and are simple to service
Spindle Pulleys:	Split steel design for strength and durability
Constant Belt Tension System:	The CBT system, exclusive to Gravely, ensures constant belt tension and consistent blade tip speed
Cutter Deck Belts:	V-Belt
Blades:	2-18"
Blade Tip Speed:	18,000 fpm

ADDITIONAL SPECIFICATIONS

Paint: Powder-coat paint

DIMENSIONS

Length: 64"
Width: 36.8"
Height: 45"
Weight: 701 lbs.

WARRANTY

Commercial: 4 Year or 750 Hour Limited Commercial Warranty
(No hour limit first two years)

OPTIONAL ACCESSORIES:

Mulching Kit	788072
Sulky, Single-Wheel	788067
Sulky, Two-Wheel	788068
Grass Side Catcher Kit	788043
Light Kit	788073
Operator Controlled Chute Baffle	788074
LaserEdge Blade Kit	792193
LaserEdge Mulch Blade Kit	792199

Pro-Walk 48

Model Number: 988185

ENGINE

Brand:	Kawasaki®
Model:	FS600V
Horsepower:	18.5
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	603 cc
Cylinder:	Cast-iron cylinder liners
Air Cleaner:	Dual element air filter
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	5.8 GAL/22 L
Drive Wheels / Tires:	20 x 8 – 10
Frame:	Tubular welded steel
Handlebar Style:	Ergonomic controls with adjustable handlebar height

DRIVE SYSTEM

Type:	Integrated Pump and Wheel Motor
Transmission:	Hydro-Gear® ZT-2800
Steering/Travel Control:	Ergonomic controls for improved operator comfort
Brakes:	Lever actuated wet disc brake, internal to transmission, assures maximum brake-holding capacity
Axles:	1.0" Diameter
Forward Speed Range:	0 – 8 mph
Reverse Speed Range:	0 – 3 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	10-gauge steel
Cutting Width:	48"
Cutting Height Adjustment:	Single-point Height of Cut for easy adjustments
Cutting Height:	1.5-5" in ¼" increments, 15 positions
Blade Engagement:	Electric Clutch
Discharge Chute:	Flip up, flexible rubber chute for strength and durability, minimizes damage to landscape and trees and eases transport of the machine
Front Caster Wheels:	11 x 4 – 5 semi-pneumatic tires
Spindles:	Maintenance-free spindles with aluminum housings provide better heat dissipation and are simple to service
Spindle Pulleys:	Split steel design for strength and durability
Constant Belt Tension System:	The CBT system, exclusive to Gravely, ensures constant belt tension and consistent blade tip speed
Cutter Deck Belts:	V-Belt
Blades:	3–16.19"
Blade Tip Speed:	18,000 fpm

ADDITIONAL SPECIFICATIONS

Paint: Powder-coat paint

DIMENSIONS

Length: 69"
Width: 50"
Height: 45"
Weight: 740 lbs.

WARRANTY

Commercial: 4 Year or 750 Hour Limited Commercial Warranty
(No hour limit first two years)

OPTIONAL ACCESSORIES:

Mulching Kit	791057
Sulky, Single-Wheel	788067
Sulky, Two-Wheel	788068
Light Kit	788073
Operator Controlled Chute Baffle	788074
LaserEdge Blade Kit	792192
LaserEdge Mulch Blade Kit	792198
Grass Side Catcher Kit	788043

Pro-Walk 52

Model Number: 988186

ENGINE

Brand:	Kawasaki®
Model:	FS600V
Horsepower:	18.5
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	603 cc
Cylinder:	Cast-iron cylinder liners
Air Cleaner:	Dual element air filter
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	5.8 GAL/22 L
Drive Wheels / Tires:	20 x 8 – 10
Frame:	Tubular welded steel
Handlebar Style:	Ergonomic controls with adjustable handlebar height

DRIVE SYSTEM

Type:	Integrated Pump and Wheel Motor
Transmission:	Hydro-Gear® ZT-2800
Steering/Travel Control:	Ergonomic controls for improved operator comfort
Brakes:	Lever actuated wet disc brake, internal to transmission, assures maximum brake-holding capacity
Axles:	1.0" Diameter
Forward Speed Range:	0 – 8 mph
Reverse Speed Range:	0 – 3 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	10-gauge steel
Cutting Width:	52"
Cutting Height Adjustment:	Single-point Height of Cut for easy adjustments
Cutting Height:	1.5-5" in ¼" increments, 15 positions
Blade Engagement:	Electric Clutch
Discharge Chute:	Flip up, flexible rubber chute for strength and durability, minimizes damage to landscape and trees and eases transport of the machine
Front Caster Wheels:	11 x 4 – 5 semi-pneumatic tires
Spindles:	Maintenance-free spindles with aluminum housings provide better heat dissipation and are simple to service
Spindle Pulleys:	Split steel design for strength and durability
Constant Belt Tension System:	The CBT system, exclusive to Gravely, ensures constant belt tension and consistent blade tip speed
Cutter Deck Belts:	V-Belt
Blades:	3–18"
Blade Tip Speed:	18,000 fpm

ADDITIONAL SPECIFICATIONS

Paint: Powder-coat paint

DIMENSIONS

Length: 71"
Width: 55.5"
Height: 45"
Weight: 770 lbs.

WARRANTY

Commercial: 4 Year or 750 Hour Limited Commercial Warranty
(No hour limit first two years)

OPTIONAL ACCESSORIES:

Mulching Kit	791058
Sulky, Single-Wheel	788067
Sulky, Two-Wheel	788068
Light Kit	788073
Operator Controlled Chute Baffle	788074
LaserEdge Blade Kit	792193
LaserEdge Mulch Blade Kit	792199
Grass Side Catcher Kit	788043

Pro-Walk 60

Model Number: 988187

ENGINE

Brand:	Kawasaki®
Model:	FS691V
Horsepower:	23
Type:	Forced Air-Cooled V-Twin 4-cycle Vertical Shaft OHV Gasoline Engine
Displacement:	726 cc
Cylinder:	Cast-iron cylinder liners
Air Cleaner:	Dual element air filter
Starter/Electrical:	Electric Ignition
Charging System:	15 Amp

ENGINE DECK/FRAME

Fuel Tank Capacity:	5.8 GAL/22 L
Drive Wheels / Tires:	20 x 8 – 10
Frame:	Tubular welded steel
Handlebar Style:	Ergonomic controls with adjustable handlebar height

DRIVE SYSTEM

Type:	Integrated Pump and Wheel Motor
Transmission:	Hydro-Gear® ZT-2800
Steering/Travel Control:	Ergonomic controls for improved operator comfort
Brakes:	Lever actuated wet disc brake, internal to transmission, assures maximum brake-holding capacity
Axles:	1.0" Diameter
Forward Speed Range:	0 – 8 mph
Reverse Speed Range:	0 – 3 mph

CUTTING DECK

Type:	Floating, adjustable, anti-scalping
Construction:	10-gauge steel
Cutting Width:	60"
Cutting Height Adjustment:	Single-point Height of Cut for easy adjustments
Cutting Height:	1.5-5" in ¼" increments, 15 positions
Blade Engagement:	Electric Clutch
Discharge Chute:	Flip up, flexible rubber chute for strength and durability, minimizes damage to landscape and trees and eases transport of the machine
Front Caster Wheels:	11 x 4 – 5 semi-pneumatic tires
Spindles:	Maintenance-free spindles with aluminum housings provide better heat dissipation and are simple to service
Spindle Pulleys:	Split steel design for strength and durability
Constant Belt Tension System:	The CBT system, exclusive to Gravely, ensures constant belt tension and consistent blade tip speed
Cutter Deck Belts:	V-Belt
Blades:	3–20.5"
Blade Tip Speed:	18,000 fpm

ADDITIONAL SPECIFICATIONS

Paint: Powder-coat paint

DIMENSIONS

Length: 71.8"
Width: 63"
Height: 45"
Weight: 795 lbs.

WARRANTY

Commercial: 4 Year or 750 Hour Limited Commercial Warranty
(No hour limit first two years)

OPTIONAL ACCESSORIES:

Mulching Kit	791059
Sulky, Single-Wheel	788067
Sulky, Two-Wheel	788068
Light Kit	788073
Operator Controlled Chute Baffle	788074
LaserEdge Blade Kit	792194
LaserEdge Mulch Blade Kit	792200
Grass Side Catcher Kit	788043